

# PATENT COOPERATION TREATY

EO/US  
PCT/GB00/00926

**PCT**

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C.20231  
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing:

28 September 2000 (28.09.00)

International application No.:

PCT/GB00/00926

Applicant's or agent's file reference:

A25738 WO

International filing date:

14 March 2000 (14.03.00)

Priority date:

19 March 1999 (19.03.99)

Applicant:

REEDER, Stephen, Michael et al

1. The designated Office is hereby notified of its election made:



in the demand filed with the International preliminary Examining Authority on:

07 July 2000 (07.07.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was



was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Authorized officer:

091913827

## PATENT COOPERATION TREATY

PCT

RECD 26 JUN 2001

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference <b>A25738 WO</b>		<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. <b>PCT/GB00/00926</b>	International filing date (day/month/year) <b>14/03/2000</b>	Priority date (day/month/year) <b>19/03/1999</b>	
International Patent Classification (IPC) or national classification and IPC <b>G08B13/14</b>		<b>RECEIVED</b> <b>OCT 26 2001</b> <b>Technology Center 2100</b>	
Applicant <b>BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY</b>			

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 8 sheets, including this cover sheet.

- ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☒ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand <b>07/07/2000</b>	Date of completion of this report <b>21.06.2001</b>
Name and mailing address of the international preliminary examining authority:  <b>European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465</b>	Authorized officer <b>Wagner, U</b>  Telephone No. +49 89 2399 8171 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00926

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-32 as originally filed

**Claims, No.:**

1-24 as originally filed

**Drawings, sheets:**

1/24-24/24 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00926

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## IV. Lack of unity of invention

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.  
☒ paid additional fees.  
☐ paid additional fees under protest.  
☐ neither restricted nor paid additional fees.

2. ☐ This Authority found that the requirement of unity of invention is not complied and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.  
☐ not complied with for the following reasons:

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

- ☒ all parts.  
☐ the parts relating to claims Nos. .

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	2-5,8,10-24
	No:	Claims	1,6,7,9
Inventive step (IS)	Yes:	Claims	
	No:	Claims	2-5,8,10-24

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00926

---

Industrial applicability (IA)    Yes:    Claims    1-24  
   No:    Claims

2. Citations and explanations  
    **see separate sheet**

## **VII. Certain defects in the international application**

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/GB00/00926

D1: WO 98 04967 A (BOWYER MARK DAVID JAMES ; COLLINS PETER DAVID (GB); ROYER KARL WILL) 5 February 1998 (1998-02-05)

D2: US-A-5 684 951 (GOLDMAN JONATHAN ET AL) 4 November 1997 (1997-11-04)

D3: WO 96 03728 A (KANG BALJIT SINGH) 8 February 1996 (1996-02-08)

**Re Item IV**

**Lack of unity of invention**

1. The present set of claims comprises 3 independent claims, namely claim 1, claiming a security aware apparatus, claim 6, claiming a remote control centre, and claim 12, claiming a home control unit.

Claim 1 merely claims transfer and receiver means, for sending and receiving messages. Claim 1 therefore has no features in common with either claim 6 or claim 12.

Claim 6 merely claims monitoring means and transmitting means, for communication with security aware apparatus (not specifically the ones claimed in claim 1).

Claim 12 claims first transmitting and receiving means, for communication with security aware apparatus and second transmitting and receiving means for communication with a remote control centre. Claims 6 and 12 therefore have no technical features in common.

2. Claims 1, 6 and 12 fail to meet Rule 13 PCT and have to be regarded as separate inventions.

**Re Item V**

**Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**First invention, as claimed in claims 1-5, 24:**

1. Claim 1 claims a security aware apparatus as it is well-known in the art. Such an apparatus is known from, for example, D1, see abstract or also D3, see abstract.

Both documents therefore anticipate the features of claim 1, which does not meet Art. 33(1) PCT for lack of novelty.

2. The use of wireless data transmission is anticipated by D3, see page 2, lines 8-11. Using Internet protocol for a security aware apparatus is known from D2, see abstract. It would be an obvious amendment to D3 to use the Internet, if appropriate. Therefore, claim 2 does not include an inventive step over the prior art, hence, Art.33(1) PCT is not met.
3. The use of electronic mail messages for the return path is known from D2. The implementation of this in the apparatus of D1 is an obvious measure for a skilled person. Claims 4 and 5 would therefore fail to meet Art. 33(1) PCT for lack of an inventive step. The use of electronic mail messages for the forward path (from the apparatus to the remote control centre) is then an obvious alternative. Art 33(1) PCT is not met by claim 3.
4. GPS Receivers are widely used in present day system which need to be aware of their position. Since the position of an apparatus can be an indication of a possible theft, the implementation of such a GPS Receiver in the security aware apparatus of D1 is regarded as an obvious alternative for a skilled person. Claims 24 therefore fails to meet Art 33(1) PCT for lack of an inventive step.

**Second invention, claimed in claims 6-11:**

1. A remote control centre as claimed in claim 6 is known from, for example, D3, see page 5, last paragraph - page 6, end. Claim 6 is therefore not novel and consequently fails to meet Art. 33(1) PCT.
2. The features of claims 7 and 9 are also disclosed by D3. Hence, claims 7 and 9 do not meet Art. 33(1) PCT for lack of novelty.
3. The use of an electronic mailing system is known from D2. The implementation of this measure in the control centre of D3 is within the design competence of a skilled person; an inventive step is therefore lacking in claims 8 and 10.

4. The concept of a local unit between the remote control centre and the security aware apparatuses is known from D1, see page 19, line 18 to page 20, line 10, and figures 6 and 7. A combination of the teachings of D1 and D3 would therefore guide a skilled person to the features of claim 11, without including an inventive step. Art. 33(1) PCT is not met.

**Third invention, claimed in claims 12-23:**

1. The concept of arranging a home control unit between the remote control centre and the security aware apparatuses is known from D1, see page 19, line 18 to page 20, line 10, and figures 6 and 7. To use connectionless communication between the home control unit and the remote control centre is lying within the design competence of a skilled person. Claim 12 is therefore not distinguished by an inventive step over D1, and fails to meet Art. 33(1) PCT.
2. The feature of claim 13 does not contribute an inventive step to the home control unit of claim 12. Art. 33(1) PCT is not met.
3. The use of an electronic mailing system is known from D2. The implementation of this measure in the home control unit of D3 is within the design competence of a skilled person; an inventive step is therefore lacking in claim 14.
2. Claims 15-22 claim different embodiments of the data transmission between the home control unit and the security aware apparatus. This data transmission is restricted to the users home. Known data transmission techniques for a domestic use are, for example, signalling on the mains electric wires or low power radio transmission as used for cordless phones. The implementation of these known techniques in the home control unit known from D1 can not justify an inventive step. Claims 15-22 therefore fails to meet Art. 33(1) PCT.
3. GPS receivers are widely used in present day system which need to be aware of their position. Since the position of an apparatus can be an indication of a possible theft, the implementation of such a GPS receiver in the home control unit of D1 is regarded as an obvious alternative for a skilled person. Claims 23 therefore fails to meet Art 33(1) PCT for lack of an inventive step.



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/GB00/00926

**Re Item VIII**

**Certain observations on the international application**

Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D1 is not mentioned in the description, nor is this document identified therein.

The features of the claims are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>A25738 WO</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/GB 00/ 00926</b>	International filing date (day/month/year) <b>14/03/2000</b>	(Earliest) Priority Date (day/month/year) <b>19/03/1999</b>
Applicant  <b>BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

15

☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

National Application No

PCT/GB 00/00926

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G08B13/14 G06F1/00 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08B G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	WO 98 04967 A (BOWYER MARK DAVID JAMES ; COLLINS PETER DAVID (GB); ROYER KARL WILL) 5 February 1998 (1998-02-05)  page 3, line 6 -page 4, line 15 page 5, line 1 -page 6, line 15 page 9, line 18 -page 11, line 5 ---	1,6,12, 15,16, 18,20,22 17,21,24
X A	US 5 684 951 A (GOLDMAN JONATHAN ET AL) 4 November 1997 (1997-11-04) abstract column 1, line 13 - line 57 column 2, line 7 - line 56 column 7, line 54 -column 9, line 60 --- -/--	1,2,4-7, 9-11 3,8

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

2 June 2000

Date of mailing of the international search report

09/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De la Cruz Valera, D

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 00/00926

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 36391 A (BRITISH TELECOMM) 7 October 1998 (1998-10-07) cited in the application	1
A	page 4, line 28 -page 5, line 26 page 8, line 13 - line 18 page 1, line 26 -page 3, line 28 ----	2-24
X	WO 96 03728 A (KANG BALJIT SINGH) 8 February 1996 (1996-02-08) page 1, line 1 -page 4, line 7 page 5, line 24 -page 5, line 30 ----	1
Y	WO 96 12264 A (PHILIPS PATENTVERWALTUNG ;PHILIPS ELECTRONICS NV (NL); PHILIPS NOR) 25 April 1996 (1996-04-25) page 1, line 1 - line 10 page 3, line 21 - line 29 ----	17,21,24
A	MARGOLIN B: "SMARTER STUFF" BYTE, vol. 22, no. 6, 1 June 1997 (1997-06-01), page 85, 87, 89, 91/92 XP000691560 ISSN: 0360-5280 P.89 See frame "fun with internet appliances" ----	2-5
A	LAWTON G: "DAWN OF THE INTERNET APPLIANCE" COMPUTER, vol. 30, no. 10, 1 October 1997 (1997-10-01), page 16, 18 XP000738076 ISSN: 0018-9162 the whole document ----	2-18
A	ANONYMOUS: "Email Controlled Devices" RESEARCH DISCLOSURE, vol. 42, no. 417, XP002112875 Havant, UK, article No. 41796 the whole document -----	2-18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

National Application No

PCT/GB 00/00926


Patent document cited in search report		Publication date	Patent family member(s)		Publication date
W0 9804967	A	05-02-1998	AU 1551097 A EP 0912919 A		20-02-1998 06-05-1999
US 5684951	A	04-11-1997	NONE		
W0 9836391	A	20-08-1998	EP 0869462 A AU 5995598 A EP 0960407 A		07-10-1998 08-09-1998 01-12-1999
W0 9603728	A	08-02-1996	AU 2986495 A GB 2304443 A, B		22-02-1996 19-03-1997
W0 9612264	A	25-04-1996	EP 0734562 A JP 9508226 T		02-10-1996 19-08-1997



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>G08B 13/14, G06F 1/00, H04L 12/28</b>		A1	(11) International Publication Number: <b>WO 00/57376</b>
			(43) International Publication Date: 28 September 2000 (28.09.00)
(21) International Application Number: PCT/GB00/00926 (22) International Filing Date: 14 March 2000 (14.03.00) (30) Priority Data: 99302134.4 19 March 1999 (19.03.99) EP (71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): REEDER, Stephen, Michael [GB/GB]; 28 Bowland Drive, Emerson Valley, Milton Keynes MK4 2DN (GB). BRADLEY, David, William [GB/GB]; Shrubland Villas, 21 Langer Road, Felixstowe, Suffolk IP11 8BP (GB). (74) Agent: BRADLEY, David, William; BT Group Legal Services, Intellectual Property Dept., Holborn Centre, 8th floor, 120 Holborn, London EC1N 2TE (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: SECURITY SYSTEMS

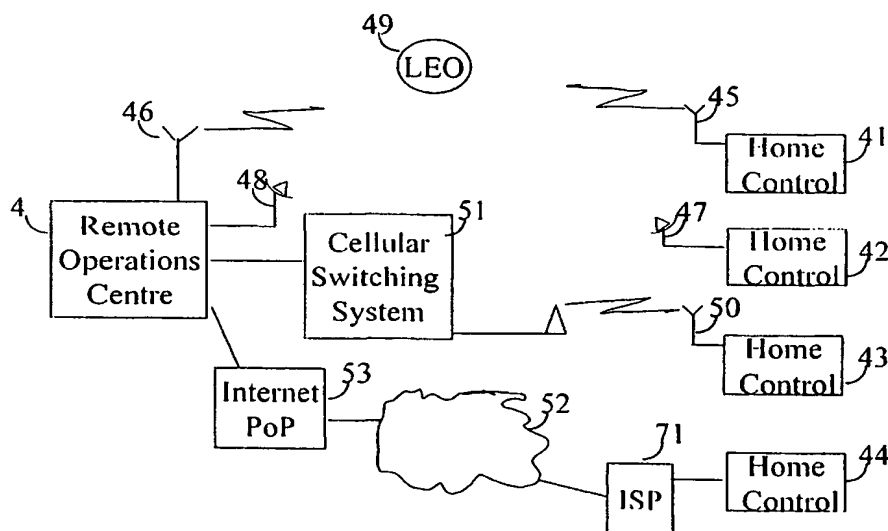

## (57) Abstract

A security system includes a remote operations centre (4) which has a point of presence (53) on a connectionless network (internet) (52). A home control unit (44) which holds a list of release codes for associated security aware apparatuses (not shown) communicates with the remote control centre which creates release codes in dependence upon the location (or identity) of the home control unit and the requesting apparatus. The home control unit may include GPS detection circuitry to allow location data to be forwarded together with requests so that unauthorised relocation of a home control centre results in the return of invalid or no data. Requests and responses between the centre and the home control units may alternatively be made using electronic mail messaging between respective electronic mailboxes. In a further feature, security aware apparatus may communicate directly with the remote control centre through connectionless network messaging.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SECURITY SYSTEMS

The present invention relates to security systems and more particularly to component parts of security systems for protecting electrical or electronic apparatus.

5 In published European patent application number 675626 the Assignee of the present invention disclosed a security system for protecting electrical appliances, in which appliances fitted with a security module, preferably during manufacture, were responsive to the connection of mains electrical power to forward a signal by way of the mains electrical connection to a security unit. The security unit was connected to  
10 both the mains power supply and to a telephone line at the premises. On receipt of signalling from an appliance, the security unit established a telephone call to a remote operations centre which, based on the calling line identity (CLI) of the customer's line returned a security code. The returned security code was then transmitted by the domestic security unit to the requesting apparatus which, provided a correct code  
15 was received, allowed connection of electrical power through to operational circuits. If an incorrect code or no code was returned, power to operational circuits was denied.

In published PCT patent applicant number GB98/00337 (publication number WO98 36391) the Assignee disclosed an improvement to the system the earlier  
20 invention, in which a volatile data store held codes for each of a number of appliances whereby only upon first connection of a new appliance or following a mains failure would it be necessary to generate a telephone call to the remote operations centre. Thus by providing a volatile data store for holding apparatus codes, application across the mains supply by a piece of apparatus requesting identity could be responded to  
25 locally.

Each of the above patent applications relies upon a modern telecommunications switching network in which CLI is available.

For the avoidance of doubt, the term "security aware apparatus" as used herein means any energy consuming device including means responsive to an  
30 interruption of power to effect, on reconnection of power, a requirement for receipt of signals characterising a location identity or an apparatus identity and including means responsive to receipt of signals characterising an incorrect code, or to the expiry of a period of time during which no such characterising signals are received, to effect



temporary inoperability of the device until receipt of signals characterising a correct code.

It will be appreciated that a switched network is not always available or may suffer congestion as a result of heavy application to the remote control centre for example if a power cut in a particular area leads to a large number of requests. Further, data transfer networks now becoming available allow for multiple use of a single consumer telephone line for many purposes which could lead to blocking of the consumer's telephone line and/or delay in receiving accurate return information.

According to the present invention there is provided a security aware apparatus including processor means responsive to connection of electrical power to create a data message which uniquely identifies the apparatus, electronic transfer means for transmitting the data message to a pre determined address and electronic receiver means for receiving a response to the transmitted message, the apparatus further including a data store for storing data including at least one release code, the processor means being arranged to cause temporary inoperability of the apparatus unless a response message characterising at least in part the respective release code is received within a predetermined period.

The electronic transfer means may be arranged to transmit electronic messages directly to a remote control centre by way of an internet connection or may be arranged to transmit an addressed electronic mail message to such a centre. Alternatively, the electronic transfer means may transmit electronic message to a home control unit using intranet communication, the home control unit returning the respective release code in the same manner.

Thus a feature of the invention includes a remote control centre responsive to requests for a release code to create an electronic message embodying a release code and an internet address, the remote control centre forwarding the message in response to such a request. A connectionless communication between the remote control centre and security aware apparatus may be used either for direct communication to a network address or by means of an electronic mail message.

The remote control centre may alternatively or additionally be arranged to communicate with a home control unit which in turn provides release messages for one or more respective associated security aware apparatuses, the home control unit requesting data in respect of each associated apparatus by connectionless

communication with the remote control centre and the remote control centre returning a data message including a list comprising the release codes for each of the respective associated apparatuses. Again, the messaging may be by direct communication using internet protocol messaging to an internet address or by  
5 electronic mail messaging.

The invention accordingly also features a home control unit responsive to requests from associated security aware apparatus to provide a release code to such apparatus, the home control unit including a data store for storing, in respect of each associated apparatus release codes for that apparatus and including receiver means  
10 for receiving release requests from associated apparatus and transmitting means for transmitting release code to such apparatus, the home control unit further including means to create an electronic data message and means to transmit such a message by use of a connectionless communication to a remote control centre, and means to receive data messages including release code data from such a remote control centre  
15 by connectionless communication.

The connectionless communication may be by use of internet protocol data message transfer or by use of electronic mail messaging techniques.

The receiving and transmitting means for communication between the home control unit and security aware apparatus may be arranged for intranet  
20 communication or for communication by way of signalling superimposed on a mains electrical circuit, or by low power radio communication which may conform with digital electronic cordless telephony standards and protocols. Alternatively connectionless communication by way of an intranet arrangement may be used. Security aware apparatus and/or the home control unit may include means responsive  
25 to signals from a global positioning satellite system (GPS) to determine the location of the apparatus or unit, electronic messages including data defining the determined location whereby the remote control centre may identify data to be transferred on location as well as on the IP address of the transmitting unit.

30 A security system including a home control unit, a remote control centre and security aware apparatus in accordance with the invention will now be described by way of example only with reference to the accompanying drawings of which:

Figure 1 is a schematic representation of at least a part of the security system;

Figure 2 is a block schematic diagram of a typical security module of protected apparatus;

5        Figure 3 shows at least a part of one of the security units of Figure 1.

Figure 4 is a schematic representation of a data stored by protected apparatus.

Figures 5a to 5e show signalling interchange between the security control unit of Figure 1 and the appliance and a remote operations centre where a remote  
10        operations centre is provided;

Figure 6 shows data which may be stored at a remote location or in a home control unit;

Figure 7 shows data which may be stored in a home control unit responsive to a remote operations centre;

15        Figures 8, 9 and 10 is a flow chart showing a process control of the protected apparatus of Figure 2;

Figures 11, 12 and 13 shows part of a flow chart for the processor of a home control unit of Figure 1 which is responsive to a remote operations centre;

Figures 14a and 14b show a flow chart of a remote operations centre (where  
20        provided);

Figure 15 is a schematic diagram showing a number of alternative ways of communicating between a home control unit and a remote operations centre;

Figure 16 is a block schematic diagram showing various methods of determining location of a home control unit;

25        Figure 17 is a schematic diagram of security aware apparatus having a DECT interface for communicating with a home control unit;

Figure 18 is a schematic diagram showing a part of a home control unit with a DECT interface for communicating with security aware apparatus of Figure 17;

Figure 19 is a schematic diagram showing a modification to include a TCP/IP  
30        interface for communication by internet or intranet;

Figure 20 shows an adapted home control unit for use with the apparatus of Figure 19;

Figure 21 is a block schematic diagram of secure premises having stand alone security unit;

Figure 22 to 25 are flow charts of the operation of a processor in the security unit of Figure 21;

5       Figures 26A to E are signalling charts showing signalling between the security unit of Figure 21 and a domestic appliance; and

Figure 27 is a schematic representation of a data store of the security unit of Figure 21.

Referring first to Figure 1, the system, previously disclosed, included within  
10 domestic premises 1, the boundary of which is indicated by a dotted line 3, a home control unit 2 containing security features for the premises 1. Various versions of the home control unit 2 are described hereinafter, some of which may be "stand alone" applications but most of which will communicate with a remote security centre.

The home control unit 2 communicates with security aware electrical  
15 appliances, one of which is indicated at 5. Communication between the home control unit and electrical appliance 5 may be in a number of ways, again hereinafter described, but basically security aware electrical appliance 5 requires a dedicated release code to be transmitted to it each time mains electrical power from a supply line 6 is disconnected and reconnected. If a security aware electrical appliance does  
20 not receive its release code then a processor, preferably integrated with power supply or other circuitry, prohibits or disconnects electrical supply to operation circuits of the apparatus. Thus referring to Figure 2 the electrical appliance 5 is modified by incorporating a switch 18 between a power supply 12 of the apparatus and operational circuits 17. It will be appreciated that the switch 18 is shown purely for  
25 ease of description and it may be incorporated into the power supply 12. The apparatus also includes a process control 15, a data store 16 and, in the particular version shown here, a frequency shift key interface (FSK) 14 for communicating across the electrical supply line 6 with a home control unit.

Figure 3 shows the essential components of the home control unit 2, these  
30 being a processor 23, data store 24 and a corresponding FSK communications interface 25 connected to the supply line 6. basically, as discussed in the aforementioned published patent application, on connection of an electricity supply by way of power input 11 to the apparatus 5, the process control unit 15 consults the

associated data store 16 to determine whether the apparatus has previously been connected in a security aware environment. If it has been so previously connected then, referring additionally to Figure 4, an appliance unlock code 26 will be stored. the process control therefore causes signalling to be applied to the supply line 6 by  
5 way of the interface 14, which identifies, for example by use of a manufacturer reference, manufacturers equipment reference and electronic serial number, the specific piece of electrical apparatus which has been connected. The home control unit of figure 3 detects the presence of the signalling and via its own FSK interface 25 compares the received security code with information in its own data store 24  
10 which may be, depending on the type of centre, a volatile store. Having compared the equipment serial number with its own data, the processor recovers from its data store the appropriate unlock code for the particular appliance and causes this code to be transmitted by way of the FSK interface 25 back to the electricity supply line 6 and thence through FSK interface 14 to the appliances own processor 15. Assuming  
15 that the codes are compatible the processor control 15 either now permits power to be connected to the operational circuits or, in an alternative mode of operation, does not effect power disconnection.

Various features of the security applied to electrical appliances in different ways and of different home control units will become apparent from the description  
20 hereinafter. However, which ever kind of communication between security aware apparatus and a home control unit and/or with a remote security centre is used the common feature is that apparatus removed from its authorised location will cease to function. Provision is made, as disclosed herein, for legitimate transfer of ownership and/or removal of security aware apparatus between premises. Thus only  
25 unauthorised removal of electrical appliances results in failure.

Turning then to Figure 8, we will now consider in brief the manner in which the security process within a security aware appliance functions. The process control unit 15, (Fig 2) which may be integral with the power supply 12 or may be a part of the operational circuitry shown at 17, is arranged to determine as hereinafter  
30 described whether power should be supplied or denied to other operational circuits 17 this capability being generally indicated by switch means 18. It will be appreciated that the process for denying power from the switched mode power supply 12 would not be so simple as a switch 18 which could be easily circumvented and will actually

be better protected such that in order to overcome the security arrangements it will be necessary to replace the entire power supply unit or substantial components thereof. The process control 15 has access to data held in a data store 16 the purpose of which will become apparent. The data store 16 is a non-volatile storage  
5 element capable of holding an appliance identity, the location identity, one or more unlocking codes and a blanking code as indicated in Figure 4. Generally speaking the location code is a 64 bit code unique to the property in which the appliance is installed and which is derived from the CLI and by the remote operations centre of Figure 1 when a customer subscribes to the service.

10 The or each unlocking code is a 24 bit code one of which is unique to the customer premises 3. A further unlock code of 24 bits may be provided in a more complex arrangement, the further 24 bit unlock code being unique to the particular electrical apparatus 5. Where a unique code for the apparatus 5 is provided this will be generated on the first occasion in which the appliance 5 is plugged into the  
15 electricity supply and will be received in response to a request to the remote operation centre 4 as hereinafter described or by stand-alone home control unit. Throughout the present specification, wherever a stand-alone home control unit is provided rather than the more secure arrangement of a remote operation centre it may be assumed that the home control processor includes the same functionality  
20 which performs in a similar manner. Where there are substantial differences in operation these may be specifically considered – for example in one case providing a special plug in module for effecting appliance code blanking - or will be apparent.

The 24 bit blanking code is unique to the appliance and, as in the unique unlock code, is generated by the remote operations centre 4 in response to receipt of  
25 a request from the apparatus 5.

The purpose of the codes is firstly to locate the apparatus, that is to say the 64 bit appliance location code is unique to the home control unit 2 in a customer premises 3 and, once a security aware apparatus 5 is aware of its location, each time it is connected or disconnected from the mains electricity supply 6 its process  
30 controller 15 causes FSK interface 14 to transmit the location information and request an unlock code.

A unique unlock code for the appliance i.e. the 24 bit unlock code (if any) uniquely provided by the remote operations centre 4 or will be returned by the home

control unit 2 to the appliance. Note that the home control unit 2 will only recognise its own location code. Where only house codes are in use the home control unit 2 will return the 24 bit house unlock code by way of the electricity supply line and the FSK interface 14.

5        If neither the appliance code nor the house code is received by the process controller 15 then power is denied to the operational circuits. In practice, power may be supplied to the operational circuitry for a pre-determined period, say 15 minutes, prior to closing down, to give sufficient time for an appropriate release code to be received.

10       The blanking code, which is unique to an electrical appliance and which is known only to the particular appliance 5 and to the remote operations centre 4 (except in the case of stand-alone operation) is used to permit the *bona fide* transfer of security aware apparatus between locations or upon sale of the equipment.

Referring to Figure 8, the operation of the process control function of the  
15 security aware apparatus of Figure 2 will now be described. On connection of power 301 by way of the electricity supply line 6 then a timer "load broadcast cover" timer 302 is started by process controller 15 which now waits to receive a broadcast message by way of the FSK interface 14. The purpose of the broadcast timer is to cover the eventuality where a major power disruption has resulted in a number of  
20 security aware appliances in the same customer premises 3 having a reconnection of electricity supply at the same time. If a catastrophic domestic electricity failure has occurred then, as hereinafter described, the home control unit 2 will also have lost electrical power. This will result, in the case of a volatile store type home control unit, in an application by the home control unit 2 to the remote operations centre 4  
25 for a reload and the home control unit 2 then causes the broadcast of the 24 bit house unlock code.

Returning to Figure 3, the process controller now goes into an interruptible state 303 to wait for the broadcast message. The processor 15 will leave the wait broadcast message state 303 in response to one of two events, a first of which is  
30 that the broadcast timer set at step 302 will expire and the path indicated at 304 will now be followed. Once the broadcast timer expires as indicated at step 305 an unlock request is sent through FSK interface 14 to the electricity supply line 6. Note that the unlock request comprises the 64 bit house code as stored in the data store

16 and/or the apparatus identity 27,28. Once the unlock request has been transmitted then an unlock timer is loaded as indicated at step 306 and the processor 15 waits for an unlock message hereinafter described with reference to Figure 8A.

Returning now to the previous stable state, that is to say the wait broadcast  
5 message state 303, if as a result of catastrophic power failure a system restart has been required then a broadcast message will be received as indicated at step 308, the broadcast message being expected to be a 24 bit house unlock code. This code is compared at step 309 with the house code stored in the data store 16 of the appliance 5 and as indicated at step 310 if the code is correct the power supply 12 is  
10 allowed into normal operation through a power up routine described hereinafter with reference to Figure 9.

If an incorrect code is received and the system lock flag of the data store 16 is set to indicate that the particular piece of apparatus 5 is security aware, that is it has previously been connected then the process controller 15 causes the power  
15 supply 12 to power down in known manner so that power will not be supplied to the operational circuits 17 of the particular apparatus 5. If at step 311 the system lock is not found to be armed then at step 313 an unlock request will be broadcast in the same manner as at step 305 and an unlock hold timer will be commenced at step 316.

20 Turning now to Figure 8A the wait unlock response state 400 into which the processor 15 has been placed may be left as a result of either the unlock hold timer expiring 401, an unlock response 402, a system lock enable response 403 or a blanking instruction 404. Thus if the unlock hold timer expires as indicated at step 401 the system lock flag in the associated data store 16 is interrogated at step 406.  
25 If the system lock is not in the enabled state, that is to say the apparatus 5 has not previously been coded from the remote operations centre 4 or a subsequent blanking operation has been carried out then the process controller 15 goes into the power up mode. If however the system lock is armed and no unlock response is received then the process controller will enter the power down state and as indicated in Figure 10  
30 will lock to that state until such time as the apparatus is disconnected from the electrical supply 6 and reconnected in a *bone fide* situation.

If now the response to the unlock request is an unlock code as indicated at 402 the unlock code is compared at step 407 with data held in the data store 16 and



if the code is correct, then at step 408 the normal power up function occurs. Again if the code received is incorrect then the stable power down state 600 will be adopted. Note that if individual appliance codes are being used the apparatus will only unlock to its unique code once the broadcast timer has expired. If only house  
5 codes are in use then the house code and the blanking code is unique. The appliance code and blanking code will not be identical or related to each being individually randomly generated by the remote operations centre if appropriate as hereinafter described.

At step 403, if a system lock enable is received in response to the unlock  
10 request then at step 409 the system lock flag is interrogated to determine whether it was previously armed and if so this would indicate that the unit has been incorrectly plugged to a home control unit which has no previous record of this particular piece of apparatus 5 and therefore the system enters the power down state 600. If however the system lock is not armed then the unlock and blanking codes including  
15 the house code and separate apparatus unlock code, if applicable, are received and stored at step 410 after which at step 411 the system lock enable is set in the data store 16 and a system lock enabled message is transmitted and power up state 500 is entered. A system lock enable response should only be received when the apparatus is first plugged to a home with home control unit facilities or after the  
20 blanking field has been correctly activated as a result of an unlock response transmitted incorporating a blank instruction at step 404. The blanking instruction is received from the remote operations centre 4 and blanking instruction will only be transmitted under specific circumstances which a known owning customer will request.

25 On receipt of a blanking instruction the blanking code is compared at step 412 and provided that it is correct as indicated at step 413 then at step 414 all of the code fields in the data store 16 are blanked and the system lock enable flag is reset so that the apparatus is now in condition for transfer to other premises. Once the blanking of the data store 16 has been completed then the system will enter the  
30 power up state 500 in the normal manner.

If however at step 413 an incorrect blanking code is received in response to the unlock request then the system enters the power down stable state 600.

Note that once a correctly identified blanking instruction has been received

the appliance is deregistered from the home control unit list at the remote operations centre 4 (if any) which will cause the home control unit 2 of the customer premises 3 to be updated as hereinafter described. De-registration may be performed in the home control unit 2 on receipt of the system lock disabled message transmitted by the FSK interface 14 at step 415.

Figures 9 and 10 show the two stable states of piece of apparatus 5 being respectively the power up state 500 and a power down state 600. In the power down state 600 the apparatus is effectively disabled and none of the operational circuits 17 will receive power. Where apparatus includes an appropriate display unit then as the microprocessor locks to prevent the apparatus functioning it may display an appropriate message such as system lock. In the power up mode 500, the power supply 12 will be supplying current to the operational circuits 17 in known manner but the process control 15 continues to monitor the FSK interface 14 for any false system lock enable states input. Note that the system lock enable message includes the electronic serial number of the apparatus which prevents false triggering to any given system lock enable message.

Thus if a system lock enable is received at step 501 the process controller 15 checks to determine whether the system lock is already armed in the data store 16 and if not at step 503 will store the unlock and blanking code fields received and will enable the system lock at step 504 and send an acknowledgement. The system then returns to the power up stable state 500.

Summarising then the operation of a security aware appliance 5 is controlled by messages transmitted by a process controller 15 through an FSK interface 14 to the electricity supply line 6, the FSK interface 14 also receiving messages whether directly from a home control unit 2 or from a remote operations centre 4 by way of a home control unit 2 for use by the process controller 15. The message format and messages transmitted by the appliance 5 are summarised in the following table:

TABLE 1

Message Name	Direction	Parameters
Unlock Request	Outgoing	message type, message reference, equipment type, electronic serial number,

		appliance location code, checksum
System Lock enabled	Outgoing	message type, message reference, checksum
Broadcast Unlock Code	Incoming	message type, unlock code, checksum
Blank Instruction	Incoming	message type, message reference, blanking code, checksum
Unlock Response	Incoming	message type, message reference, unlock code, checksum
System Lock Enable	Incoming	message type, message reference, electronic serial number, appliance location code, unlock code, blanking code, checksum

The parameters used (and hence stored in the data store 16 of the security aware appliance 5) are as follows:

5	Message Type	8 bit field indicating the type of message being sent
	Message Reference	8 bit field used to link a series of message exchanges into a session
	Equipment Type	64 bit field characterising the manufacturer and product uniquely. First 16 bits identify the manufacturer and will be controlled and issued by a remote operations centre body. The latter 48 bits are manufacturer allocated apparatus and model identities and will be entered into the system data store of a security aware apparatus during manufacture.
10		
15	Electronic Serial Number	64 bit field uniquely identifying this product from other equipment of the same type (as identified by the previous field)
	Unlock Code (1)	24 bit field carrying the unlock code for the property (normally generated by the remote operations centre 4 on a per property basis)
20		

Unlock code (2)	24 bit field carrying a unique unlock code for the particular apparatus (if used) generated by the security provider (remote operations centre) as per appliance basis
Blanking Code	24 bit field carrying a blanking code for the appliance (generated by the security provider on a per appliance basis)
checksum	16 bit checksum allowing detection of potential message corruption

10           Having considered the components and action of a security aware apparatus  
5, consideration will now be given to the home control unit 2 of Figure 1 in a  
customer premises 3. Turning now to Figure 11, on first connection of mains power  
to the electricity supply line 6 and on each subsequent connection of power to the  
home control unit 2 the processor 23 causes a connection to be established by the  
15 tone generator 22 through a telecommunications network (PSTN, Internet, radio  
system, cellular network) to the remote operations centre 4. A modem request for an  
equipment list is then transmitted and the remote operations centre 4 using locational  
data of the customer premises 3 responds with an equipment list as hereinafter  
described. In effect the equipment list identifies each apparatus registered as present  
20 together with its individual unlocking code (if any) and the house code previously  
mentioned. Thus in a single modem exchange as indicated at 801 the request is  
transmitted at 802 and an equipment list is received at 803 after which the network  
connection is released.

Note that if at any time power to the system fails data held identifying the  
25 house code and apparatus is immediately lost from the data store 24 and on  
reconnection the process is carried out again. In this way, even if the home control  
unit 2 is stolen along with property in the customer premises 3 it will not be useable  
to provide unlocking codes for the appliances 5. However, the home control unit 2  
will include programmable storage for holding the access code (telephone number,  
30 Internet Address, E-mail Address) to the remote operator centre 4.

Assuming that there are items in the list, as indicated at step 804, the house  
unlocking code is broadcast at step 805 for comparison in individual appliances 5 as  
described hereinbefore with reference to Figure 8.

If however the list is empty the home control unit will move to its normal main state 900 which is its primary stable state at all times when power is connected.

Turning now to Figure 11A, the FSK interface 25 of Figure 3 monitors the  
5 electricity power line 6 for an unlock code request received from one of the security aware appliances 5 in the customer premises 3. On receipt of an unlock request, as indicated at step 901, the received appliance identity code is compared with the data held in the data store 24 to determine whether the equipment is currently listed as present and if so interrogates a blanking field associated with the particular piece of  
10 apparatus to determine whether that field is set, this occurs at step 903. For the avoidance of doubt it is noted that the blanking field for a piece of apparatus will only be enabled if the customer has previously had an interchange with the remote operations centre 4 to request removal of a piece of equipment from the list. In a stand alone control centre arrangement the blanking instruction arises as a result  
15 either of the customer keying a special code in to the control centre or by plugging a special module in to provide supply line signals to the control centre.

In the normal course of events the blanking field will not be enabled and the processor 23 looks at the appropriate unlock code for the requesting apparatus (or the house code where individual unlock codes are not in use), at step 904, and uses  
20 the FSK interface 25 to transmit the unlock response (namely the unlock code) at step 905 prior to returning to its normal state.

Returning to step 902, if the apparatus 5 forwarding the request is not present in the equipment list held in the data store 24, this will indicate that the appliance 5 has not previously been plugged into a system in the customer premises  
25 3. The processor 23 therefore causes the establishing of a call through the networks as previously referenced and using the modem 22 interchanges with the remote operations centre 4 data identifying an equipment code request, at step 906, which request includes some identification of the apparatus plugged in, for example the manufacturing code, type and serial number as previously described. Causing the  
30 modem 22 to forward this information results in a response from the operations centre including an unlock code and blanking code which at step 909 is transmitted by way of the FSK interface 25 to the electricity supply line 6 for receipt by the

process control 15 via FSK interface 14 of Figure 2 causing the appropriate response of Figure 8 i.e. the unlock response chain beginning at step 403 to be followed.

Note that the codes and the equipment are added to the list in the data store 24. Now at step 910, a timer is started awaiting the return of a system lock enable  
5 hereinafter described with reference to Figure 12.

Once the home control unit 2 is in the system lock confirm state 970 it will only leave after if the timer, set at step 910, expires as indicated at step 971 in which case it repeats the transmit of system lock enable at step 972 and recommences the timer or on receipt of a system lock enable message as transmitted  
10 at step 411 of Figure 8. Note that if the system lock is armed, as indicated at step 409 of Figure 8 in the particular piece of apparatus, then it is likely that the entire system installed in the customer premises 3 will lock up until such time as the appliance 5 is disconnected from the system.

However if the system lock enable signal is returned, as indicated at step  
15 974, then the list in the data store 24 is marked accordingly at step 975 and the system returns to its main state 900 after transmitting a confirmation message to the remote operations centre 4 (if appropriate).

Returning now to Figure 11A and particularly to step 903, if as hereinbefore referred the blanking field has been enabled as a result of a customer application to  
20 the remote operations centre 4 (or direct instruction as referred to above), then after step 903 a timer is loaded at step 911, following which the unlock and blanking codes are transmitted by way of the FSK interface 25 of Figure 3 to the electricity supply line 6 this being received by the appropriate FSK interface 14 of Figure 2 in apparatus to be blanked. A blank covering timer is loaded at step 913 after which  
25 the equipment enters a wait blank response state at 920 (Figure 13). If the blank covering timer expires 921 (Figure 13) prior to receipt of a response from the apparatus 5 which is to be blanked then the system simply returns to the main state since this would indicate that an incorrect code has been identified at step 412 of Figure 8.

30 However, if the correct blanking code has been transmitted to a piece of electrical apparatus 5 then a blank response, transmitted at step 415 of Figure 8, will be received as indicated at step 922 of Figure 13. Once the blank response has been received from the piece of apparatus indicating that the security aware apparatus

concerned is now clear for transfer to other premises it is removed at step 923 from the list held in the data store 24 and a call is established by way of the network to the remote operations centre 4. In the case of stand alone apparatus, once blanking has occurred then the apparatus is simply removed from the home control unit listing.

5           In a single modem interchange the processor 23 causes the transmission of a message indicating that the blanking function has been completed and will receive from the remote operations centre a revised listing for storage in the volatile data store first acknowledging that blank response has been acknowledged. This occurs at steps 924 and 925 of Figure 13. If the remote operations centre is aware that  
10 adjacent properties or properties likely to share a common electricity supply such as in households divided into apartments but having separate telephone line 7 and home control units 2, three bits of the message type will be used to identify messages directed to a particular home control unit 2, and the home control unit 2 will use the particular message type on first set up to program a communications channel  
15 identified by those first three bits to security aware appliances in particular premises.

Intelligence may be built into the remote operations centre 4 enabling the system to cause blanking of apparatus wrongly allocated to a particular home control unit and subsequent correction when the blanked apparatus is reconnected. Thus, for example, if a domestic power failure occurs in one property subsequent reconnection  
20 will cause the home control unit 2 to broadcast its own house code but apparatus connected on the same power circuit will time out and request a code through the adjacent home control unit 2. This may be identified to cause reallocation.

The situation mentioned is thought unlikely where correct balancing of local power supplies occurs. Suitable inductive correction in mains electricity meters  
25 should avoid such problems being significant.

The message formats and messages incoming and outgoing to and from the home control unit 2 are as shown in Table 2 in which the remote operations centre 4 is identified by the legend ROC and a piece of electrical apparatus 5 is identified as SWA.

TABLE 2

Message Name	Direction	Parameters
Request Equipment List	Outgoing (to ROC)	message type, checksum
Equipment Code Required	Outgoing (to ROC)	message type, equipment type, electronic serial number, checksum
HCC_Blank Complete	Outgoing (to ROC)	message type, equipment type, electronic serial number, checksum
Equipment Stored Confirm	Outgoing (to ROC)	message type, equipment type, electronic serial number, checksum
Broadcast Unlock Code	Outgoing (to SWA)	message type, unlock code, checksum
Blank Instruction	Outgoing (to SWA)	message type, message reference, blanking code, checksum
Unlock Response	Outgoing (to SWA)	message type, message reference, unlock code, checksum
System Lock Enable	Outgoing (to SWA)	message type, message reference, electronic serial number, appliance location code, unlock code, blanking code, checksum
Receive Equipment List	Incoming (from ROC)	message type, number of entries, appliance location code, unlock code, ROC Phone number 1, ROC Phone number 2, [1..number of entries] (equipment type, electronic serial number) , checksum
Equipment Code Response	Incoming (from ROC)	message type, appliance location code, unlock code, blanking code, checksum
HCC_Blank Response	Incoming (from ROC)	message type, checksum



Unlock Request	Incoming (from SWA)	message type, message reference, equipment type, electronic serial number, appliance location code, checksum
System Lock Enabled	Incoming (from SWA)	message type, message reference, checksum

The parameters used in the above are as follows:

	Message Type	8 bit field indicating the type of message being sent
5	Message Reference	8 bit field used to link a series of message exchanges into a session
	Equipment type	64 bit field characterising the manufacturer and product uniquely, first 16 bits characterising the manufacturer and will be controlled and issued by the remote operations centre, the latter 48 bits being under manufacturer control
10	Equipment Serial Number	64 bit field uniquely identifying the product from other equipment of the same type.
	Appliance Location Code	64 bit field uniquely identifying the security provider (first 24 bits identifying the remote operations centre) and the property within the domain, that is the customer premises 3 identified by the latter 40 bits
15		
	Unlock Code	24 bit field carrying the unlock code for the property (house code) or the unlock code for the apparatus within the property as appropriate
20		
	Blanking code	24 bit field carrying the blanking code for the appliance generated by the operations centre on a per appliance basis
	Number of Entries	16 bit field indicating the number of appliances protected at customer premises 3
25		
	Checksum	16 bit checksum indicating potential message corruption.

Referring now to figure 14 the remote operations centre for use by the systems herein described is fully described in the previously referenced PCT application. However, for the completeness operational flow charts of the centre are included in this specification.

5 Multiple instances of the ROC main state which is the sole state of the remote operations control centre 4 may be running at any time to handle a multiplicity of calls which may arrive by way of the telephone lines, electronic mail message, internet communication or cellular communication or by way of an electrical distribution system. Considering just a single instance of the operation of the remote  
10 operation main control state 810, on receipt of an incoming call signalling by way of a connected modem will indicate the request which has been received from the home control unit 2 of a customer premises 3. The most likely input from a home control unit 2 is that shown in 811 that is to say a modem signal requesting an equipment list from the ROC.

15 The CLI or other locational data will provide line identity to the processor as indicated at step 812 and the processor will compare the requesting line identity with a list of registered line identities held in a data store. If at step 813 a registered line identity or location code is found then the equipment list for that location together with the house code and individual equipment unlocking codes (if appropriate) and  
20 any blanking information are retrieved from the data storage unit at step 814. This information is then passed by way of the modem at step 815 for use by the home control unit 2 as indicated in Figure 11.

If however, at step 813 a request has been received from an unregistered line or location at step 816 the interchange of data with the remote customer is  
25 terminated and the line identity and any further information received in the equipment list request are recorded in an operations and maintenance exception log which may be used to determine attempted fraudulent use of the system or to identify the location of a potentially stolen control centre unit 2.

As has been mentioned at step 814 any blanking code request is returned to  
30 the home control unit for use at step 903 of figure 11A. The blanking field together with the stored blanking code for a particular piece of equipment (or for all of the equipment at a designated location) will only be present as a result of either the action of control centre staff in response to a customer's request or as a result of a

controlled access using multifrequency tones by way of the telephone line to provide personal identification numbers (PIN) or other security so that the customer can request blanking of one or more pieces of security aware apparatus 5.

Considering now an equipment code request from a home control unit 2, when  
5 the request is noted as indicated at 820 the locational data is obtained at step 822 and as previously described is compared with valid location or line identities in the data store. (Step 823). Again an invalid line identity will be handled in the same manner as steps 816 and 817 while on receipt of a valid identification the location code for the particular customer premises 3 is loaded from the data store and  
10 random blanking codes and/or unlocking codes dedicated to the particular piece of equipment are generated at step 825 and temporarily stored. An equipment cover timer is loaded at step 826 and at step 827 the code response is transmitted by way of the modem 33 to the home control unit. The system now waits either for an equipment store confirm message from the home control unit 2 as indicated at figure  
15 12 in which case as indicated at step 828 on detection of the equipment store confirm the equipment cover timer is stopped at step 829 and the appropriate list for the registered line identity is updated in the data storage unit with the identity of the new piece of equipment together with it's appropriate blanking and unlock codes as generated previously. If however, the equipment cover timer expires as indicated at  
20 step 830 then the system at step 831 restarts the timer and makes a further attempt at step 832 to forward the equipment code response to the home control unit 2.

The final incoming signal from a home control unit 2 at a customer premises 3 is that of an HCC blank complete detected at steps 835 which comes back as a result of blanking being completed at a home control unit as indicated at steps 924  
25 and 925 of figure 13. On receipt of the HCC blank complete indication from a home control unit 2 to the location is collected at step 836 and at step 837 the usual check is made to ensure that this is from a valid location. Again steps 816 and 817 in which the modem exchange is terminated and the line identity and other information recorded in an exception log is provided for non-registered locations.

30 Once the check on the identity has been completed, the appropriate record is located in the data store and the particular piece of equipment is deleted from the equipment list at step 839. A HCC blank response is transmitted at step 840 which

response may include a revised complete equipment list for the given location if required.

A further advantage of the present invention is the ability to identify from a stored location code that is the house location code, of a piece of apparatus the origin  
5 of a wrongly located appliance. Thus, security forces or police might be provided with repatriation units whereby recovered apparatus can be identified.

Thus, if the remote operations centre 4 receives a repatriation location request  
850 the repatriation line identity is collected from the CLI interface 32 and the usual check to ensure that the line is registered as a repatriation line is carried out at step  
10 852.

If the line is not registered for repatriation identity purposes the exchange of data via the modem 33 is terminated and the line identity and other information concerning the transaction is transferred to the exception log at step 817.

Assuming that the repatriation location request originates from a valid location  
15 as identified at step 852, the equipment location code received is used to look up in the data store address details for the original source of the apparatus 853 which information is transmitted by way of the modem at step 854 to the repatriation equipment.

While not included in the flowcharts of Figure 13 it will be appreciated that  
20 more complex functions are readily provided by the system. Thus for example when an equipment code is required at step 820 the system may be adapted to receive the manufacturers code, equipment type and serial number from the security aware apparatus being installed at the customer premises 3. This information may be used to access manufacturers databases or distributors databases to ensure that the  
25 equipment is of a bona fide origin.

Bona fide registered equipment repairers may be permitted to receive on a single call an unlocking code for a piece of security aware apparatus but would not be allowed to receive a blanking code such that so long as the apparatus remained in the possession of the repairer it could be unlocked for the purposes of repair but could  
30 not be blanked for onward distribution.

Timed locking of apparatus could also be provided such that if customer premises were not being occupied or parents wish to restrict access to particular pieces of equipment then temporary locking could be provided on request. Thus any

request for an equipment list arising from the designated premises, if the home control unit 2 detected a request from a piece of apparatus not included in the list might include a return list indicating that the apparatus was to remain locked.

Release of the locked apparatus could only occur on a subsequent request for  
 5 an equipment list after the expiry time set for unlocking. The following message formats shown in Table 3 apply at the remote operations centre.

Table 3

Message Name	Direction	Parameters
Request Equipment List	Incoming	message type, checksum
Equipment Code Required	Incoming	message type, equipment type, electronic serial number, checksum
HCC_Blank Complete	Incoming	message type, equipment type, electronic serial number, checksum
Equipment Stored Confirm	Incoming	message type, equipment type, electronic serial number, checksum
Repatriation Location Request	Incoming	message type, appliance location code, equipment type, electronic serial number, checksum
Receive Equipment List	Outgoing	message type, number of entries, appliance location code, unlock code, ROC Phone number 1, ROC Phone number 2, [1..number of entries] (equipment type, electronic serial number) , checksum

## 23

Equipment Code	Outgoing	message type, appliance location code, unlock code, blanking code, checksum
Response		
HCC_Blank Response	Outgoing	message type, checksum
Repatriation Location Response	Outgoing	message type, owner's name, [1..3] address line, telephone number, checksum

The parameters used in the above are as follows:

	Message Type	8 bit field indicating the type of message being sent
5	Message Reference	8 bit field used to link a series of message exchanges in to a session
	Equipment Type	64 bit field characterising the manufacturer and product uniquely First 16 bits characterise the manufacturer under control of a central domain. The
10		later 48 bits are under manufacturer control.
	Electronic serial Number	64 bit field uniquely identifying this product from other equipment of the same type.
	Appliance location Code	64 bit field uniquely identifying the remote operations centre (first 24 bits) central domain controlled)
15		and the property (later 40 bits under control of the remote operations centre)
	Unlock code	24 bit field carrying the unlock code for the property (generated by the remote operations centre on a per property basis); or 24 bit field carrying an unlock code
20		specific to the equipment (generated by the remote operations centre)
	Blanking code	24 bit field carrying blanking code for the appliance generated by the remote operations centre on a per appliance basis
25	Number of entries	16 bit field indicating the number of appliances protected at the selected property

Owners name	20 ASCII characters
Address line	20 ASCII 2 characters
Checksum	16 bit checksum indicating potential message corruption

5

Turning now to Figure 15, as previously mentioned, a home control unit 2 (of Figure 1) communicates with a remote operations centre 4 by way of a telephone line. The remote operations centre 4 utilising CLI to determine the location of the requesting home control unit and to base transfer of information thereon. In the present invention a number of home control units operate in a similar manner to that previously described carrying the functions of list creation and maintenance and code control for release of apparatus connected within the home. In a further development the home control unit 41 may communicate directly with the remote operations centre 4 by way of radio frequency signals or microwave signals. Thus as indicated at 45 the home control unit may be connected to a transmitting aerial while the home control unit 4 has a receiving aerial 46. In this case the home control unit may have its identity burnt into a storage medium. This is not however a preferred solution since if the home control unit 41 was stolen with the equipment in the house, it would be possible for an unauthorised user to operate stolen apparatus. Nevertheless, once the remote operations centre 4 is aware of the theft of a home control unit box, including a burnt in identity, it would thereafter decline to provide information to the calling home control. As an alternative to the communication method of home control unit 41, a home control unit 42 may communicate with the remote operations centre by way of a low earth orbital satellite system such as indicated by transmission dish 47 and receiver 48 at the remote operations centre 4. In this case signals from the home control unit to the remote operations centre are reflected by a low earth orbital satellite 49. Again the identity of the home control unit 42 may be burnt into the system or may be, as hereinafter described, determined by other means.

30 In yet a further communications method the home control unit 43 is connected by way of a GSM system 50 to a cellular switching system 51, which communicates with the remote operations centre 4. In this case the GSM identity of the home control unit transmission system is known to the cellular switching system

and therefore a CLI can be provided the remote operations centre. Further alternative coding of the home control unit identity may be provided in addition to the cellular switching system identity or the alternative location methods hereinafter described may be used.

5           One potential advantage of using modifiable home control identities might be the use of an insertable subscriber identity module (SIM) card which may allow the user to transfer to an alternative home and/or to take the SIM card out of the home control unit 43 when not in use, for example when premises are to vacated for a period of time.

10           Finally, home control unit 44 is shown as being connected, for example, by way of an internet service provider link 71 and the internet or world-wide web 52 to the remote operations centre by way of an internet point of presence 53. Again such a connectionless kind of communication either in real time or by way of electronic mail communication will allow transfer of data between the remote  
15 operations centre and the home control unit 44. Thus for each of the functions required to be carried out by a home control unit an e-mail message, for example could be generated comprising the coded information from a stealth aware appliance to be transmitted by way of connectionless messaging to the remote operations centre where a return e-mail can be generated and sent back to the home control unit  
20 44.

          In a still further development of this mode of operation, e-mail messaging capability could be built into stealth aware appliance 5 for example, so that in the absence of a home control unit 44 direct communication between a stealth aware appliance and the remote operations centre could be established, the remote  
25 operations centre being responsive to a serial identity in electronic form from the appliance to return appropriate unlock and blanking codes as required.

          In each of the scenarios of Figure 15 the difficulty of identifying with certainty the presence of a home control unit with a built in serial number and tying it to a particular location has been noted. Thus in Figure 16, to which reference is now  
30 made, alternative positional location systems may be used. For example, it is known that global positioning systems (GPS) using a number of satellites with a fairly simple module can locate a unit to an accuracy of less than 30 metres on a global basis. With more sophisticated systems location to a little as three metres is possible. Thus



providing a home control unit or a directly communicating self-aware apparatus with a GPS unit, as shown in the home control unit 54, as GPS 55 permits the near exact location of the requesting home control unit to be identified by use of triangulation from two or three GPS satellites representatively shown at 56. thus, prior to  
5 communicating with a remote operations centre the home control processor will utilise the GPS 55 to determine its co-ordinates and these co-ordinates are transmitted in the message to the remote operations centre 4. This enables a secure home control unit 54 to be used where CLI, for example, is not a practicality or where e-mail messaging, internet communication, or non-locational radio communication  
10 with the remote operations centre 4 is in use. In this case, the remote operations centre 4 need not even be in the same country or connected to the same network as the home control unit since the data store at the remote operations centre in respect of the particular home control unit will be based on its GPS identity.

In the case of the home control unit 43 (of Figure 15) location of the home  
15 control unit is possible by use of a triangulation system of the cellular switching system 51. As described in published patent application number 824840 comparison of time delay in signalling between the transmitting aerial 50 of the home control unit 43 and a number of cellular operator receiving sites, schematically represented at 57, allows calculation of the location of the home control unit. Thus in addition to the  
20 security of the SIM in the home control unit 43, further locational detail can be obtained and passed to the remote operations centre 4.

Finally, for completeness and as previously mentioned, the home control unit 58 shows a unit identity module 59 which may be used in place of or in addition to each of the locational identity methods of CLI, radio signal triangulation and GPS  
25 transmissions.

In a further alternative communication between a home control unit and a remote operations centre 4, direct communication by way of the mains power line, for example by means of a locational chip built into an electricity meter connected to the mains electricity distribution network could be used. Thus a service provider,  
30 potentially for example electricity distribution companies, could provide a control centre with which communication over the electricity supply using known protocols could be used to transfer data to and from a remote operations centre. This may be advantageous, for example in apartment blocks where an electricity substation within

the block could provide service to all of the apartments connected thereto. The full functionality of the remote operations centre would thus be provided monitoring signals on a loop distribution for unit identity and code requests. Again, where a communal operations centre in an apartment block is in use it may be possible to  
5 have direct communication between an apparatus 5 and the operation centre directly by way of the electricity supply line.

Having considered alternatives for communication between a remote operations centre and a home control unit alternative communication techniques between apparatus 5 and the home control unit 4 now fall to be considered.

10 In a first alternative development, referring to Figures 17 and 18, in place of the FSK interface (14 of Figure 2) digital electronic cordless telephone protocols (DECT) as used for communication between telephone handsets and base stations in domestic premises may be provided. Thus, a DECT interface 60 transmits the requests as previously described, such requests arising from the reconnection of the  
15 switch mode power supply 12 and this communication is received on a corresponding DECT unit 63 incorporated in the home control unit 2. The signalling is received by way of schematically represented aerial 62 which will also transmit the return information to the apparatus 5 by way of its DECT interface 60. It will be appreciated that other low power communications techniques could be used, for  
20 example low power radio frequency in other forms than coded in accordance with DECT protocols could be used.

Figures 19 and 20 show a modification of apparatus 5 and home control unit 2 in which the FSK interface in the apparatus 5 is replaced by a TCP/IP interface which may generate electronic messages for transmission either by way of an  
25 intranet connection 66 to a corresponding TCP/IP interface 65 of the home control unit or may communicate directly with a remote operations centre by way of the internet 67. It will be appreciated that where TCP/IP interface communication using an intranet between security aware apparatus 5 and a home control unit 2 is in use, then all of the other options for communication between the home control unit 2 of  
30 Figure 20 and the remote operations centre 4 are still available.

It will also be noted that the use of GPS directly in security aware apparatus 5 would enable e-mail messaging directly to the internet in a secure manner since even if the internet address of either home control unit or the security aware

apparatus is changed, the transmitted data will reflect the true location of the requesting apparatus.

Having considered various hardware aspects of the apparatus, consideration is now given to the signalling interchange between an appliance, a home control unit  
5 and a remote operations centre where such is provided. Referring then to Figure 5 and also to Figures 11 and 14 hereinbefore described, in Figure 5A is shown signalling from the home control unit to the remote operations centre request equipment list 802 received by the remote operations centre as indicated at step 811. In return at step 815 the remote operations centre returns signalling which is either  
10 an empty equipment list 803 or, as indicated in Figure 5B, a list containing apparatus identities and codings. As indicated in Figure 5B, an unlock code is broadcast (805 of Figure 11) received by security aware apparatus at 308.

Moving now to Figure 5C and referring additionally to Figure 8, on first connection of the apparatus or on connection of uncoded security aware apparatus,  
15 when the broadcast timer has expired an unlock request is sent at step 305. In Figure 5C if the requesting equipment is not in the list then an equipment code required message is sent 906 to the remote operations centre, which is received at step 820 (Figure 14B) resulting in an equipment code response being transmitted to the home control unit at step 826. When received in the home control unit 907 this  
20 results in a system lock enable being transmitted 909 back to the requesting apparatus, received at 403 of Figure 8A and ultimately results in a response of system lock enabled to the home control unit at 411 received (Figure 12 at 974) in the home control unit which transmits an equipment store confirm message to the remote operations centre at 975. The remote operations centre uses the equipment  
25 stored confirm message received at 828 as a confirmation that the equipment has been coded.

Turning to Figure 5D, if the equipment, which sends an unlock request at 305 is in the list as indicated at 902 then, assuming the blanking field is not enabled, an unlock response is sent at 905 which is received at 402 of Figure 8.

30 Figure 5E shows a sequence of events leading to blanking of an appliance. In this case the customer will have communicated as indicated with the remote operations centre to request blanking of appliance. Subsequent to this the customer will cause the home control unit to reset either by disconnecting power or by use of a

reset button which will cause the home control unit to contact the remote operations centre with a request equipment list message (802-811) which will result in an equipment list being returned (815-803) to the home control unit with the blanking field of the appropriate appliance set. Immediately on receipt of the equipment list, because the list is not empty and the home control unit assumes disconnection of house power supply, it will broadcast the general unlock code at 805. Subsequently, when the customer unplugs the particular appliance or at least disconnects mains power and then causes its reconnection, as previously described at step 305, an unlock request will be transmitted by the appliance controller to the home control unit received at 901. This will result in a blank instruction being returned at step 912 from the home control unit which, as shown Figure 8A at step 404, will result in a system lock disabled response at 415 indicating that blanking has been completed. As shown in Figure 13, once a blank response is received at 922, an home control unit blank complete message is transmitted to the remote operations centre at 924 resulting in an home control unit blank response being transmitted back to the home control unit from the remote operations centre at 840.

Figure 21 shows the component parts of a security system using security aware appliances 5 of exactly the same form as hereinbefore described, but arranged to operate without use of a remote operations centre. Thus, as shown in figure 21 to which reference is now made, the security aware appliance 5 is connected to the mains electricity supply 6 within or connected to which is a security unit 72 either in the form of a plug in module or built in in some way to the electricity supply system as, for example, a dummy power socket or built into the premises electricity metering appliance. Also shown are two special units, a blanking key unit 74 and a memory unit 75 the function of which is noted hereinafter.

As an alternative to the use of a memory unit 75 as hereinafter referenced, a back-up security unit 73 may be provided which shadows the output of the security unit 72 since there is no other central store of unlocking and blanking coding for appliances 5 connected to this kind of system. Thus, if a failure of a security unit occurred it could render all appliances in security aware premises 3 to be rendered unserviceable.

The security units 72, 73 comprise the same components effectively as shown in Figure 3, but may additionally include the unit id 59 of Figure 16 or a GPS

unit 55 which could be used by the stand alone control unit in generating codes and which, unless previously blanked, could result in the security unit not functioning if it is moved from its known GPS location.

As with the home control unit 2 of Figure 1, when the unit is first connected to power, as indicated in Figure 22 at 610, it will broadcast an unlock code at 611 before entering its main state at 700. The broadcast unlock code 611 is always broadcast if ever power is disconnected from the security unit 72 and then reconnected. The function of the unlock code is as hereinbefore described to permit equipment connected to the system to receive power on reconnection after a mains failure. This avoids multiple unlock requests being transmitted simultaneously from reconnected apparatuses.

Once the unlock code has been broadcast then the processor of the security unit 72 enters its main state 700 (Figure 23) awaiting an unlock request from secure apparatus. Thus turning to Figure 23, on receipt of an unlock request at 701, the system checks at 702 to determine whether the item transmitting the request has an entry in the data store shown in Figure 27. If there is no entry for the requesting equipment, as indicated at 702, then at 706 unlock and blanking codes are created using, for example, a random number generation program and these unlock codes and blanking codes are stored at 708 in the equipment list of Figure 27 and the number of appliances in the list is updated. At 709 a system lock enable message is transmitted to the security aware appliance and a system lock enable timer is set at 710. The system then awaits a system lock confirm as indicated at 770 of Figure 24 and, assuming system lock enabled message is received from the security aware appliance at step 774 returns to the main state of Figure 23.

Should the system lock enable timer expire, as indicated at 771, then the system lock enable message is again transmitted at 772 and the system lock enable timer reloaded at 773, the control unit looping back to await system lock confirm.

In the absence of a system lock confirm being received within a predetermined (heartbeat) time period may result in the apparatus being deleted from the equipment list or marked as unresponsive in the equipment list so that the processor of the home control unit 2 can return to its main state to monitor for other equipments.

Returning now to Figure 23 and in particular step 702 where the requesting equipment appears to be in the list a check is carried out to determine whether the memory key 75 has been inserted and has transmitted an unlock request with a memory key identity. If the memory key has been inserted then the list (data store  
5 Figure 27) of the security unit 72 is dumped using the same transmission method as is used to the security aware appliances. The memory key may either be stored in a safe place by the occupier of the premises 3 or may be used to dump the list to an operations centre either by direct transfer or by telephonic transfer.

Assuming that the memory key 75 has not been inserted, a check is now  
10 carried out to determine whether the unlock request has occurred while the blanking key 74 is also connected to the system. If the blanking key is not present then the unlock code for the particular appliance is located at 704 and an unlock response is transmitted at 705 prior to the unit returning to the main state 700.

If an appliance is disconnected and reconnected and the blanking key is  
15 inserted either directly to the security unit or by way of the mains electricity supply, then an equipment code covering timer is loaded at 711 and a blanking instruction including the blanking code is transmitted at 712. A timer is started at 713 and the system now waits for the blank response to come from the security aware appliance 5 at step 720. Referring then to Figure 25 briefly, if the blank covering timer expires  
20 without response from the security aware appliance 5 then the processor of the security unit 72 will return to its main state without taking further action. If however the blank response is received, as indicated at step 722, then the particular appliance is removed from the list and the number of appliances in the list updated accordingly.

The backup unit 73 may function in the same way as the memory key 75 in  
25 that the security unit may periodically do a list dump to the backup unit so that the data storage in each of the units is comparable. The blanking key 74 may include coding so that only a blanking key relating to the particular security unit 72 can ever be used with the particular security unit to blank security aware appliances 5.

Thus considering the signalling interchanges between the home control and  
30 appliances reference is made to Figure 26, the first being Figure 26A where on connection of mains power (Figure 22 610) a broadcast unlock code is transmitted for receipt by the appliance controller so that if a complete domestic mains failure has

occurred then this will be received as indicated in Figure 8, 308, in exactly the same manner as for other home control units using the remote operations centre.

Turning again to Figure 23 and also to Figure 8, when an unlock request is transmitted by a security aware appliance 5 as indicated at 305, then as shown in Figure 26B if the apparatus is not currently in the equipment list then a system lock enable message will be created at 709 for reception as indicated at 403 of Figure 8A.

This will result in a system lock enable message being returned at 411 to enable the home control unit 72 to add the apparatus to the list.

If as indicated at 702 the equipment is present in the data store, then an unlock response 705 is returned as shown in Figure 26C.

Now as shown in Figure 26D, in the case where at 703 a blanking key is present, then on receipt of the unlock request a blank instruction will be sent to the particular appliances once it is plugged back in or has mains reconnected thereto. As indicated in Figure 8A the unlock and blanking codes fields are reset and a system lock disabled (blank response) is transmitted at 415.

It is here noted that the security unit 72 may communicate with security aware appliances in any of the appropriate manners previously determined including but not limited to FSK signalling across a mains electricity supply, low powered radio signalling or DECT signalling. Intranet communication may also be used.

## CLAIMS

1. A security aware apparatus including processor means responsive to connection of electrical power to create a data message which uniquely identifies the apparatus, electronic transfer means for transmitting the data message to a pre determined address and electronic receiver means for receiving a response to the transmitted message, the apparatus further including a data store for storing data including at least one release code, the processor means being arranged to cause temporary inoperability of the apparatus unless a response message characterising at least in part the respective release code is received within a predetermined period.
2. A security aware apparatus as claimed in claim 1 in which the electronic transfer means adds a network address to the data message and transmits the message by way of a connectionless network using internet protocol.
3. A security aware apparatus as claimed in claim 1 in which the electronic transfer means creates an electronic mail message which is transmitted to a mailbox associated with an associated remote control centre.
4. A security aware apparatus as claimed in any preceding claim in which the electronic receiver means has an address on a connectionless network to which messages are transmitted by an associated remote control centre.
5. A security aware apparatus as claimed in any one of claims 1, 2 or 3 in which the apparatus has an associated mailbox address from which electronic mail messages are periodically down loaded.
6. A remote control centre for use in a security system, the centre including processor means for determining release codes for each of a plurality of security aware apparatuses, a data store for storing the codes determined, electronic monitoring means to capture electronic messages on a connectionless network, such messages originating from security aware apparatus, and electronic transmitting



means for transmitting messages embodying respective release codes to requesting apparatus on a connectionless network.

7. A remote control centre as claimed in claim 6, the centre having a point of  
5 presence on a connectionless network, the monitoring means monitoring for messages at the point of presence.

8. A remote control centre as claimed in Claim 6 associated with an electronic mailbox, the monitoring means periodically recovering electronic mail messages  
10 embodying release code requests from said mailbox.

9. A remote control centre as claimed in any one of claims 6, 7 or 8 in which the electronic transmitting means transmits electronic message data by way of the connectionless network directly to an address of requesting apparatus.  
15

10. A remote control centre as claimed in any one of claims 6, 7 or 8 in which the electronic transmitting means creates an electronic mail message including the release code(s) and causes the message to be transmitted to a mailbox address associated with requesting apparatus.  
20

11. A remote control centre as claimed in any one of claims 6 to 10 in which the release codes associated with security aware apparatus are grouped in accordance with associated home control units, the receiving means receiving electronic messages from home control units and the transmitting means returning multiple  
25 respective release codes using electronic messaging by way of a connectionless network.

12. A home control unit responsive to requests from associated security aware apparatus to provide a release code to such apparatus, the home control unit  
30 including a data store for storing, in respect of each associated apparatus release codes for that apparatus and including first receiver means for receiving release requests from associated apparatus and first transmitting means for transmitting release codes to such apparatus, the home control unit further including means to

create an electronic data message and second transmitting means to transmit such a message by use of a connectionless communication to a remote control centre, and second receiver means to receive data messages including release code data from such a remote control centre by connectionless communication.

5

13. A home control unit as claimed in claim 12 in which the second transmitting means transmits the electronic data message directly to a network address representing a network point of presence of a remote control centre.

10 14. A home control unit as claimed in claim 12 or claim 13 in which the second transmitting means forwards the electronic message to an electronic mailbox associated with the remote control centre.

15 15. A home control unit as claimed in any one of claims 12, 13 or 14 in which the first transmitting means forwards release codes to security aware apparatus by superimposing signalling on a mains electrical circuit to which both the home control unit and the security aware apparatus are connected.

20 16. A home control unit as claimed in any one of claims 12, 13 or 14 in which the first transmitting means transmits release codes to security aware apparatus using low power radio transmission.

25 17. A home control unit as claimed in claim 16 in which the radio signalling complies with digital electronic cordless telephone (DECT) protocols and standards.

18. A home control unit as claimed in any one of claims 12, 13 or 14 in which the first transmitting means transmits release codes to security aware apparatus by forwarding a message to an address of a connectionless data network.

30 19. A home control unit as claimed in any one of claims 12 to 18 in which the first receiving means monitors a mains electrical circuit for signals superimposed thereon by security aware apparatus.

20. A home control unit as claimed in any one of claims 12 to 18 in which the first receiving means is a low power radio receiver.

21. A home control unit as claimed in claim 20 in which the radio receiver  
5 operates in accordance with DECT protocols and standards.

22. A home control centre as claimed in any one of claims 12 to 18 in which the first receiving means monitors a point of presence in a connectionless network for messages including release code requests.


10

23. A home control unit as claimed in any one of claims 12 to 22 further including means to calculate a locational code from a global positioning satellite system, the locational code being included in data messages sent to the remote control centre.

15



24. A security aware apparatus as claimed in any one of claims 1 to 5 further including means to calculate a locational code from a global positioning satellite system, the locational code being included in data messages sent to the remote control centre.

20

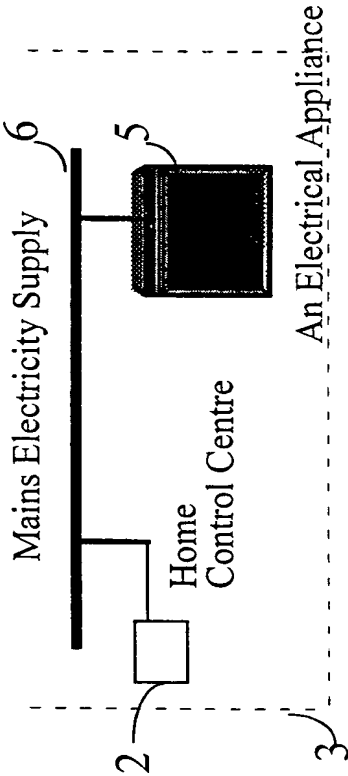

Data Storage: Security Aware Appliance:	28
Manufacturer Reference (16 Bits) Manufacturer's Equipment Reference (48 Bits)	27
Electronic Serial Number (64 Bits)	26
Appliance Location Code (ROC Identity 24 Bits, House Identity 40 Bits)	
House Unlock Code (24 Bits)	
Appliance Unlock Code (24 Bits)	
Blanking Code (24 Bits)	
Flags: Blanked, System Lock,	

Fig 4

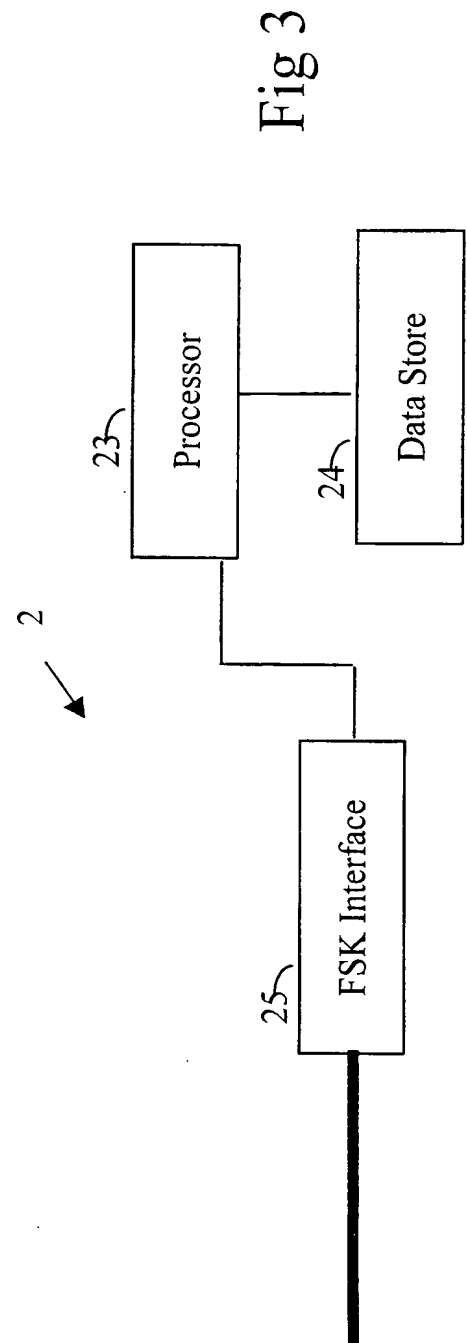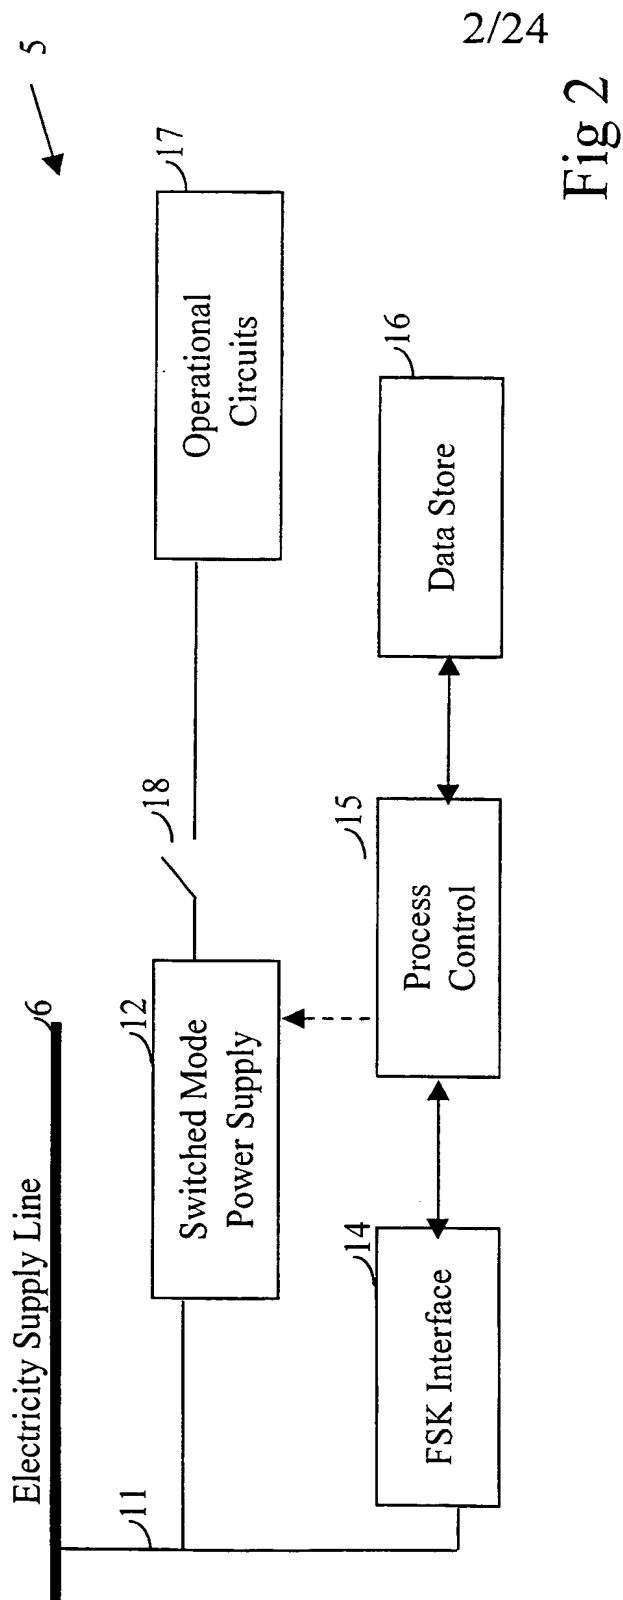

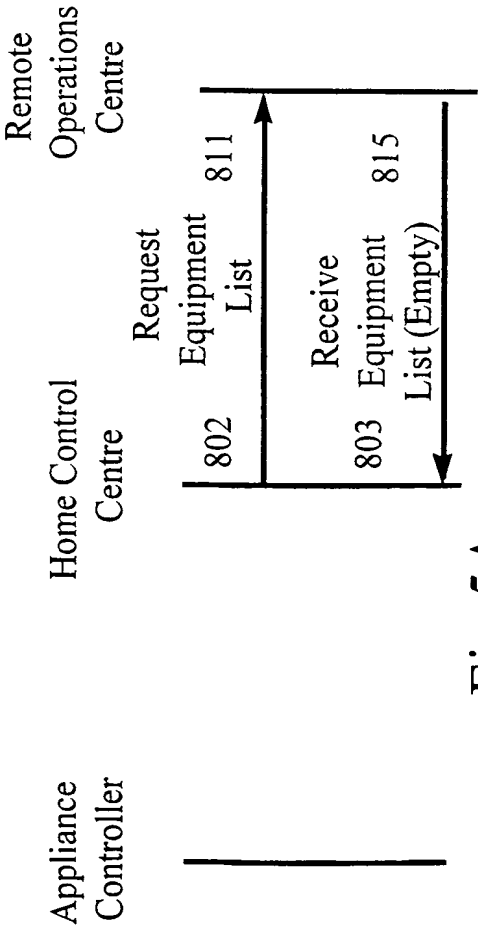


Fig 5A

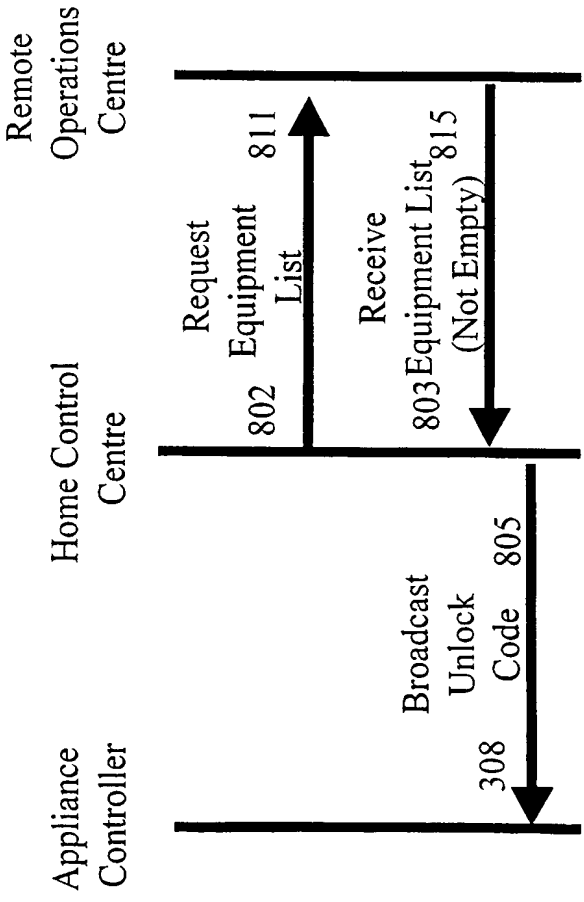


Fig 5B


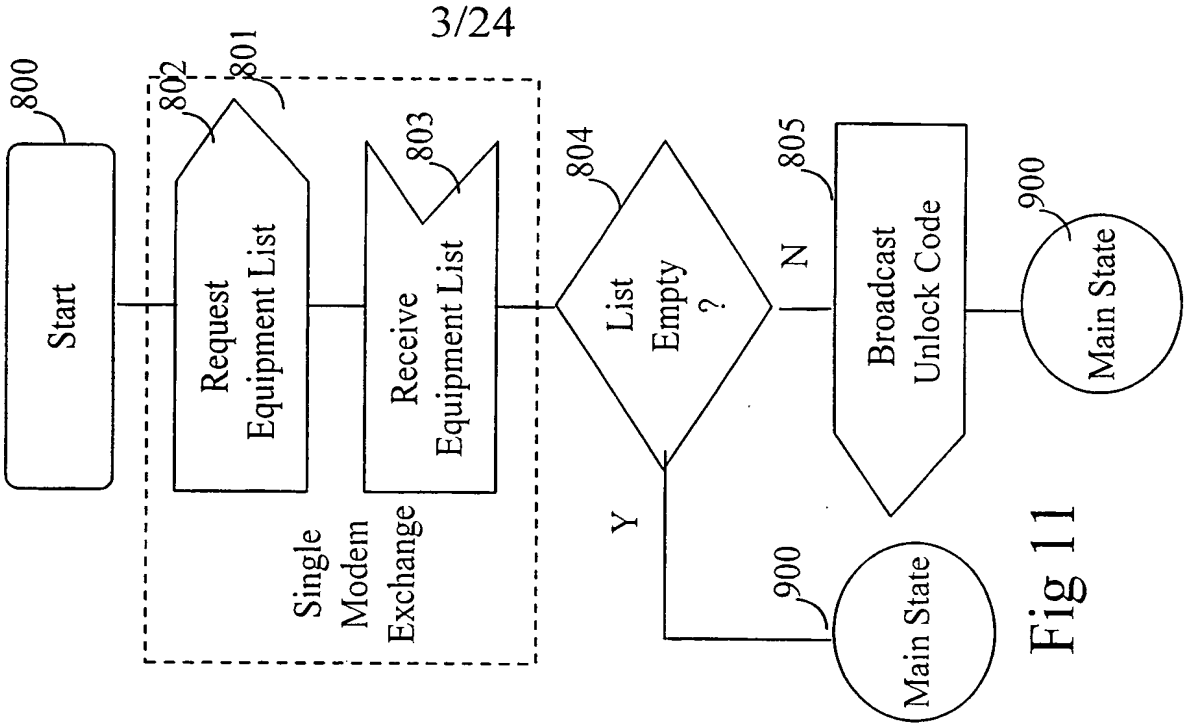


Fig 11

4/24

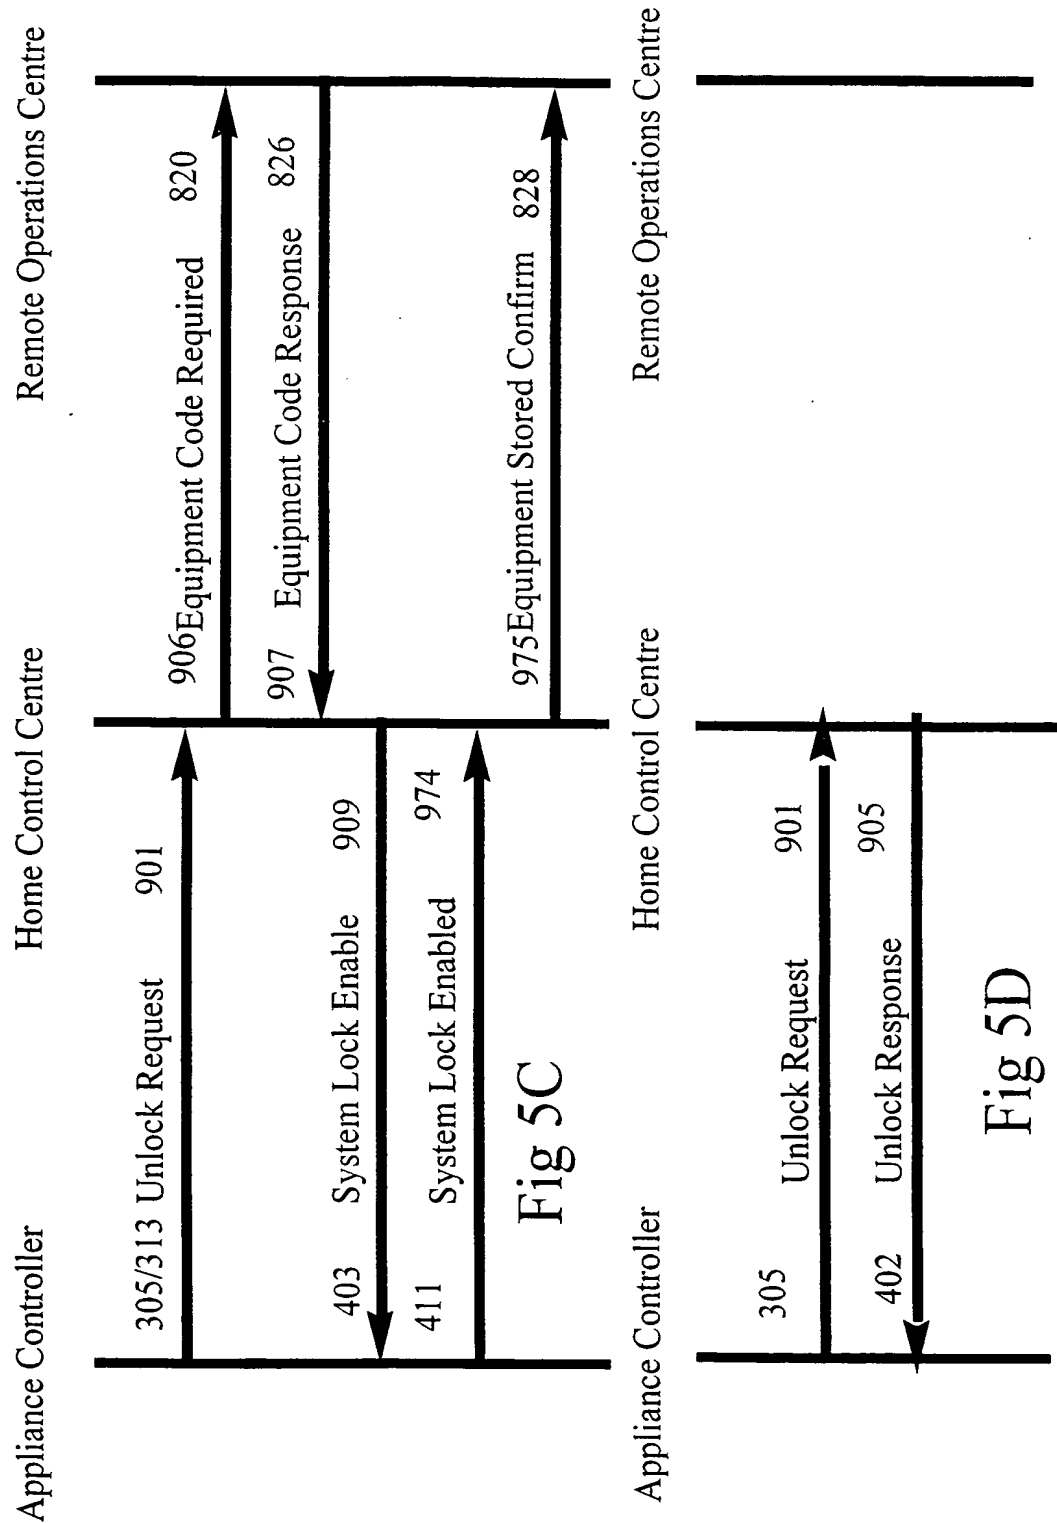

5/24

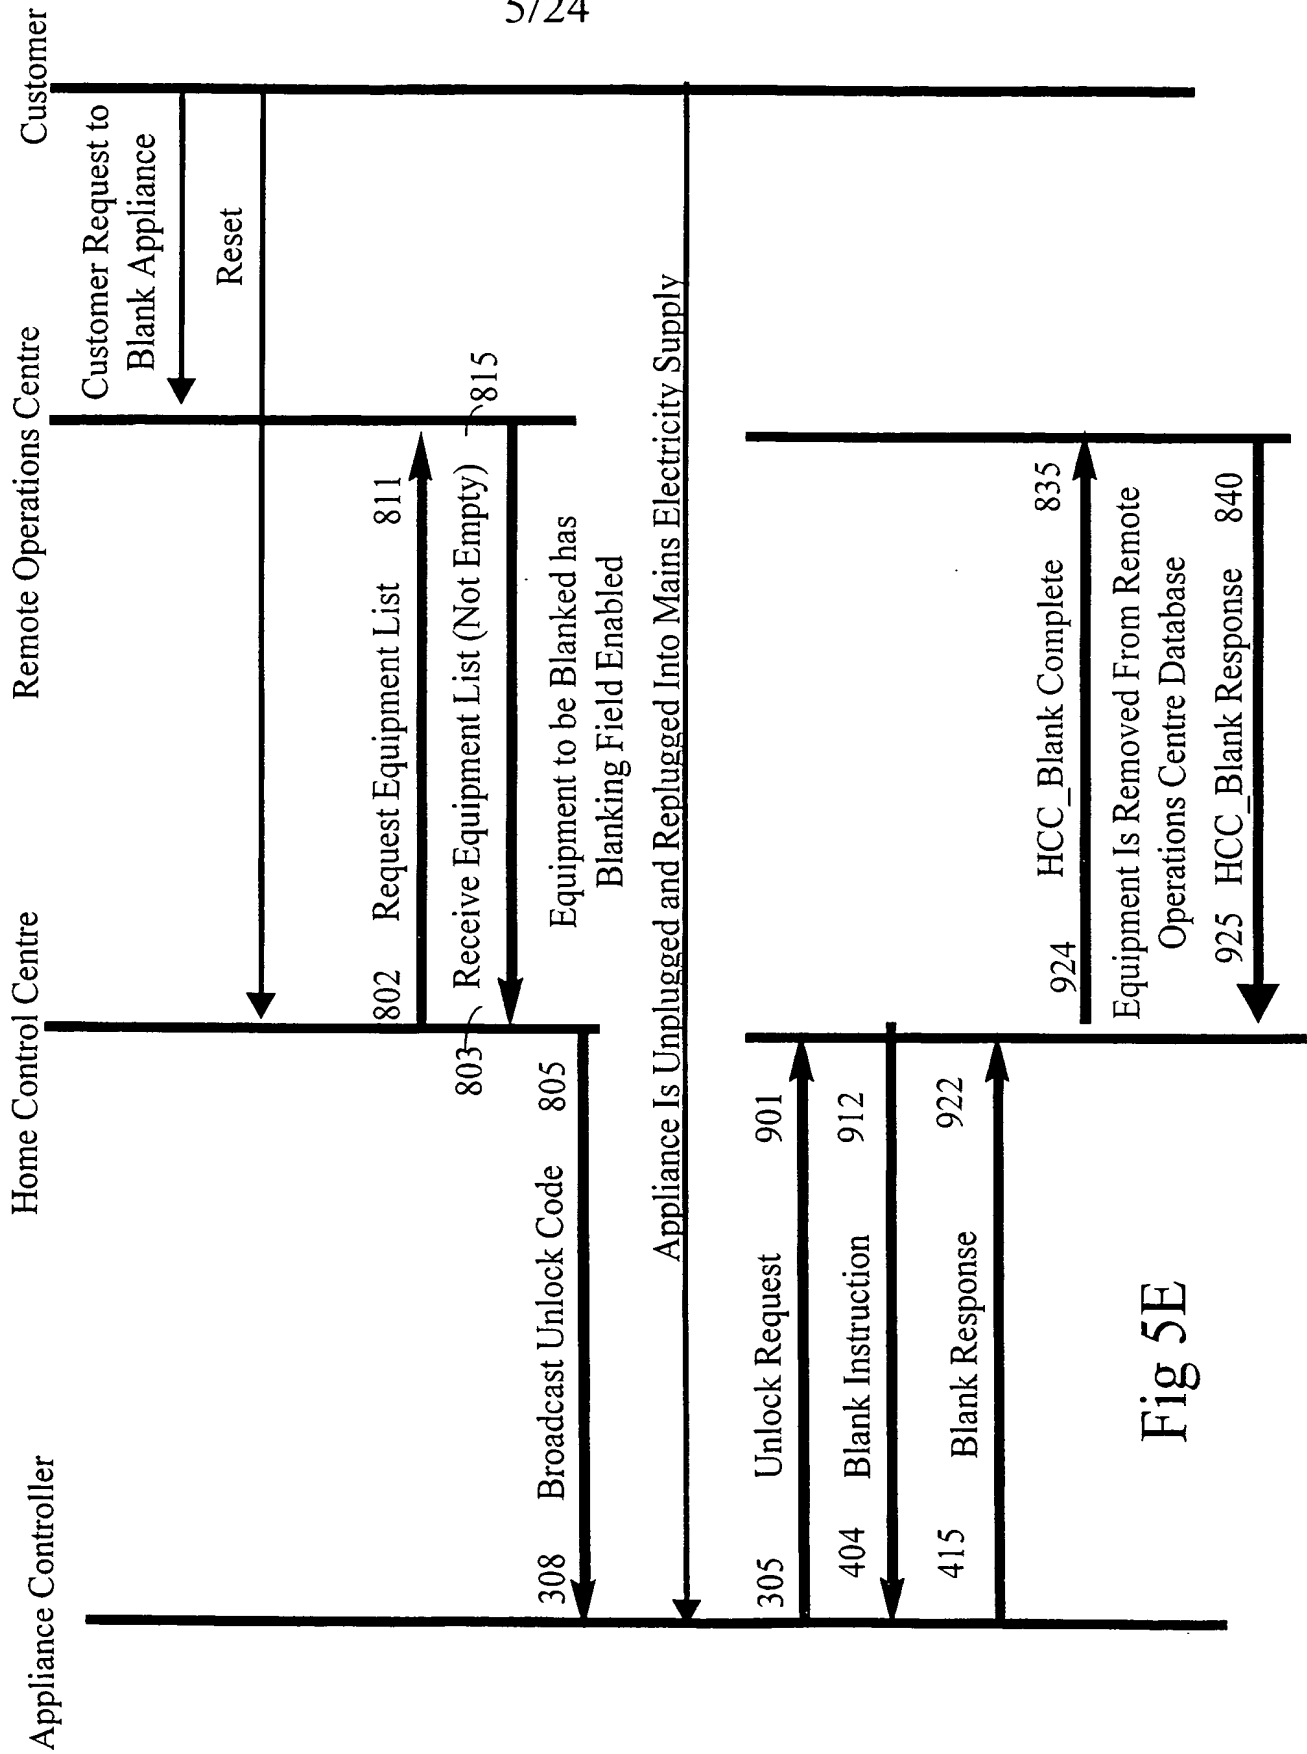


Fig 5E



Data Storage: Remote Operations Centre	
Per Customer Location:	Location Code (40 Bits)
House Unlock Code (24 Bits)	
Identity ( Customer Telephone Number, GPS, Unit ID, GSM _ SIM)	
Customer blanking PIN	
Customer Name (20 ASCII Characters)	
Customer Address (20 ASCII Characters) (Several Lines)	
Number of Appliances in List (16 Bits)	
Per Appliance :	List No (16 Bits)
Equipment Type (64 Bits)	
Electronic Serial Number (64 Bits)	
Appliance Unlock Code (24 Bits)	
Blanking Code (24 Bits)	
Flags: Blank, System Lock,	

Fig 6

Data Storage: Home Control Centre (Volatile)	
Number of Appliances in List (16 Bits)	
House Unlock Code (24 Bits)	
(Per Appliance):	List No (16 Bits),
Appliance ID (128 Bits)	
Appliance Unlock Code (24 Bits)	
Blanking Code (24 Bits)	
Flags: Blanked, System Lock,	

Fig 7

8/24

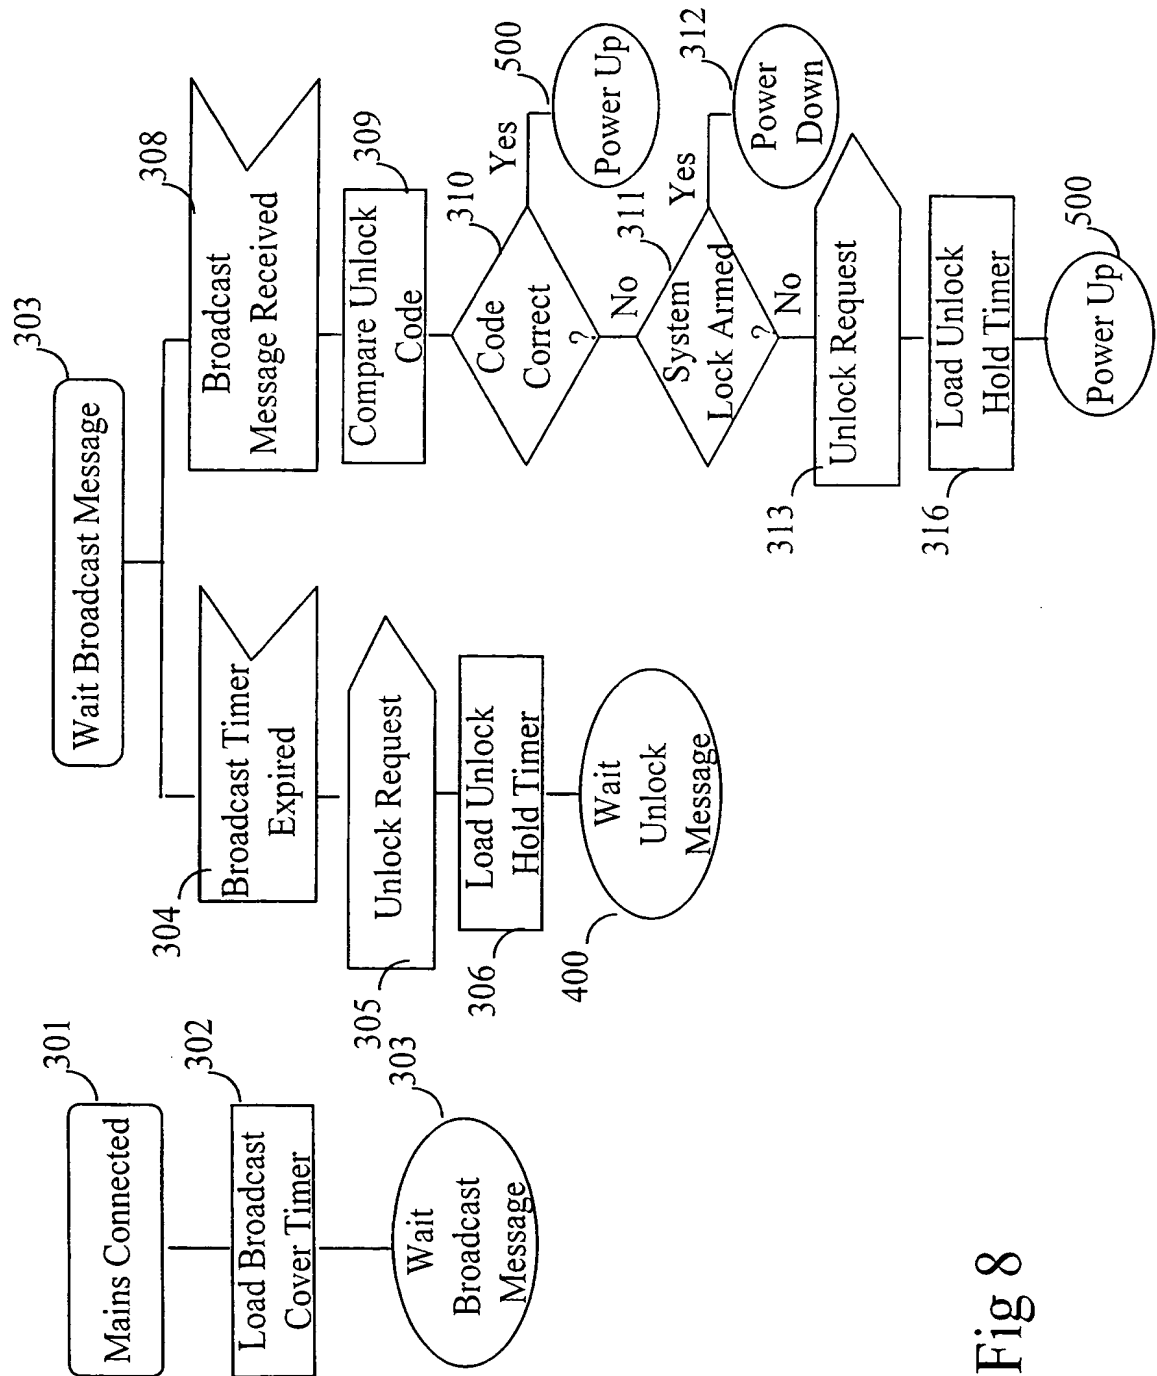


Fig 8

9/24

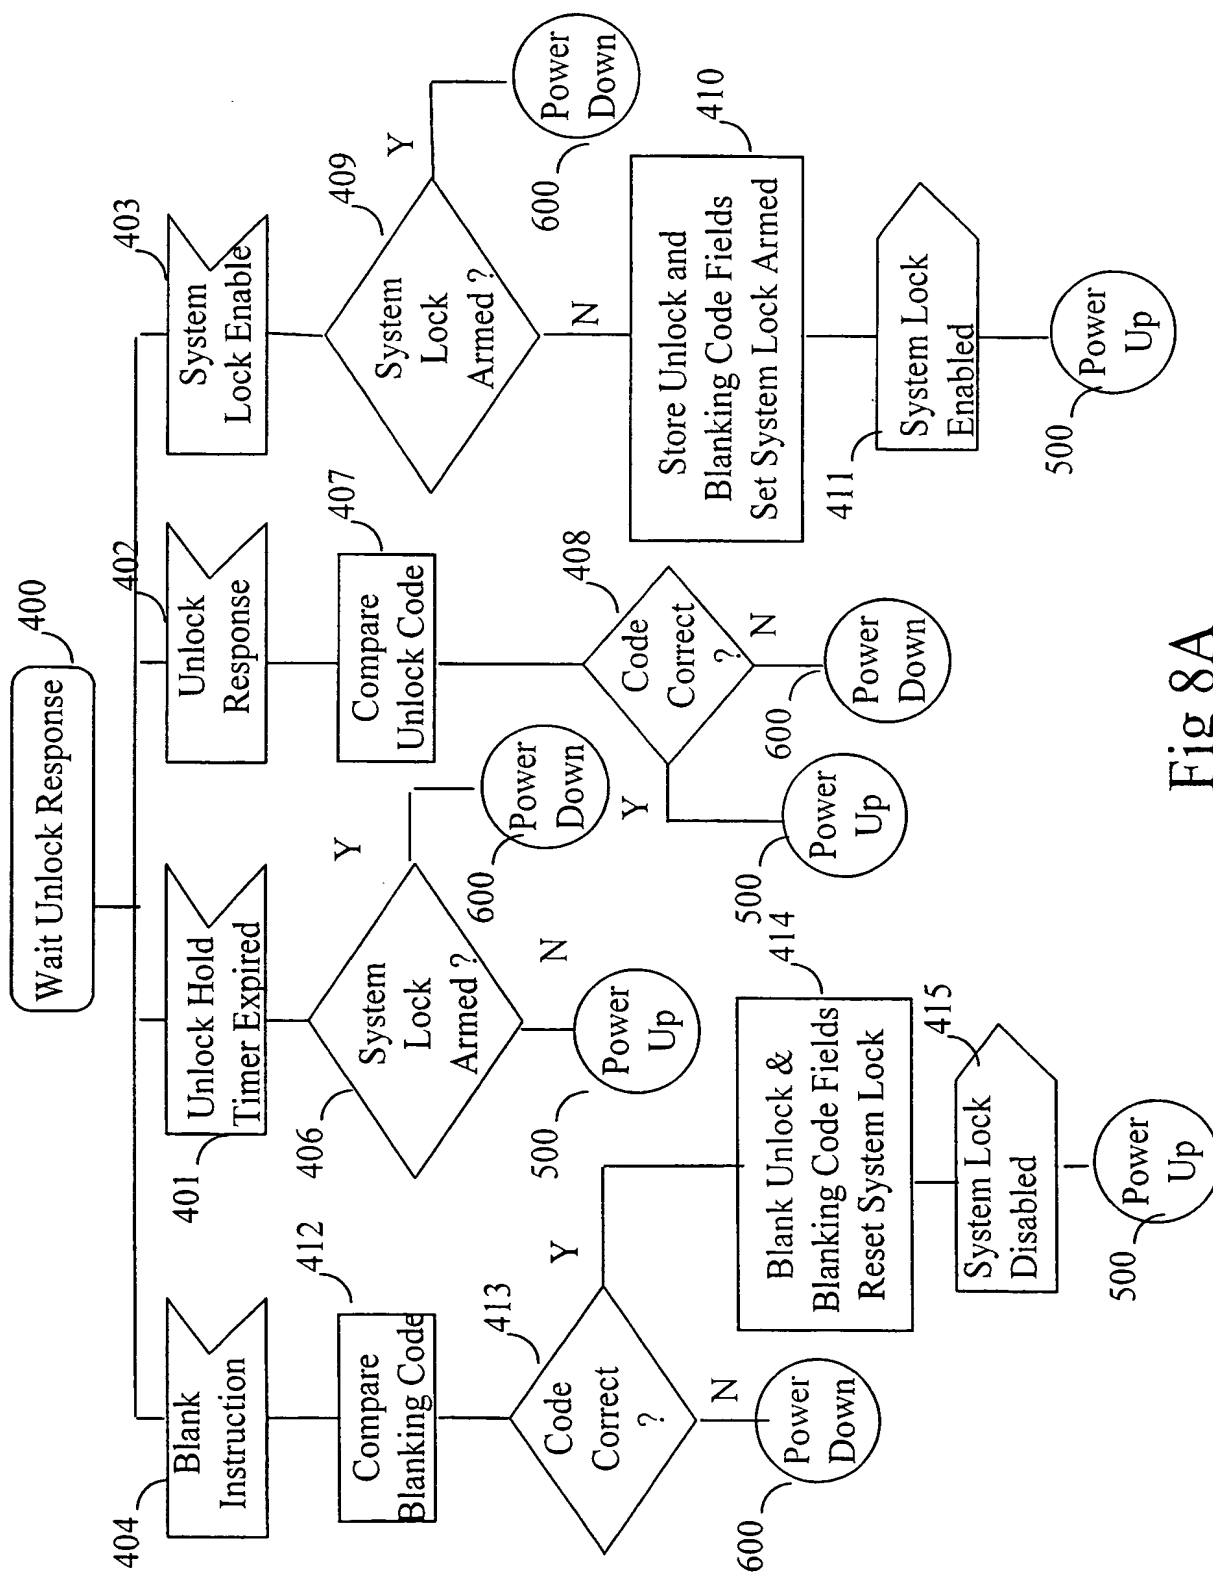
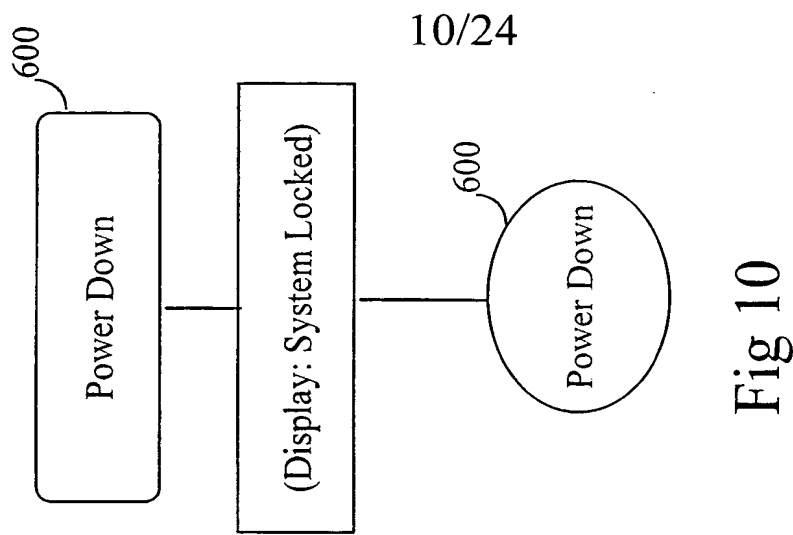
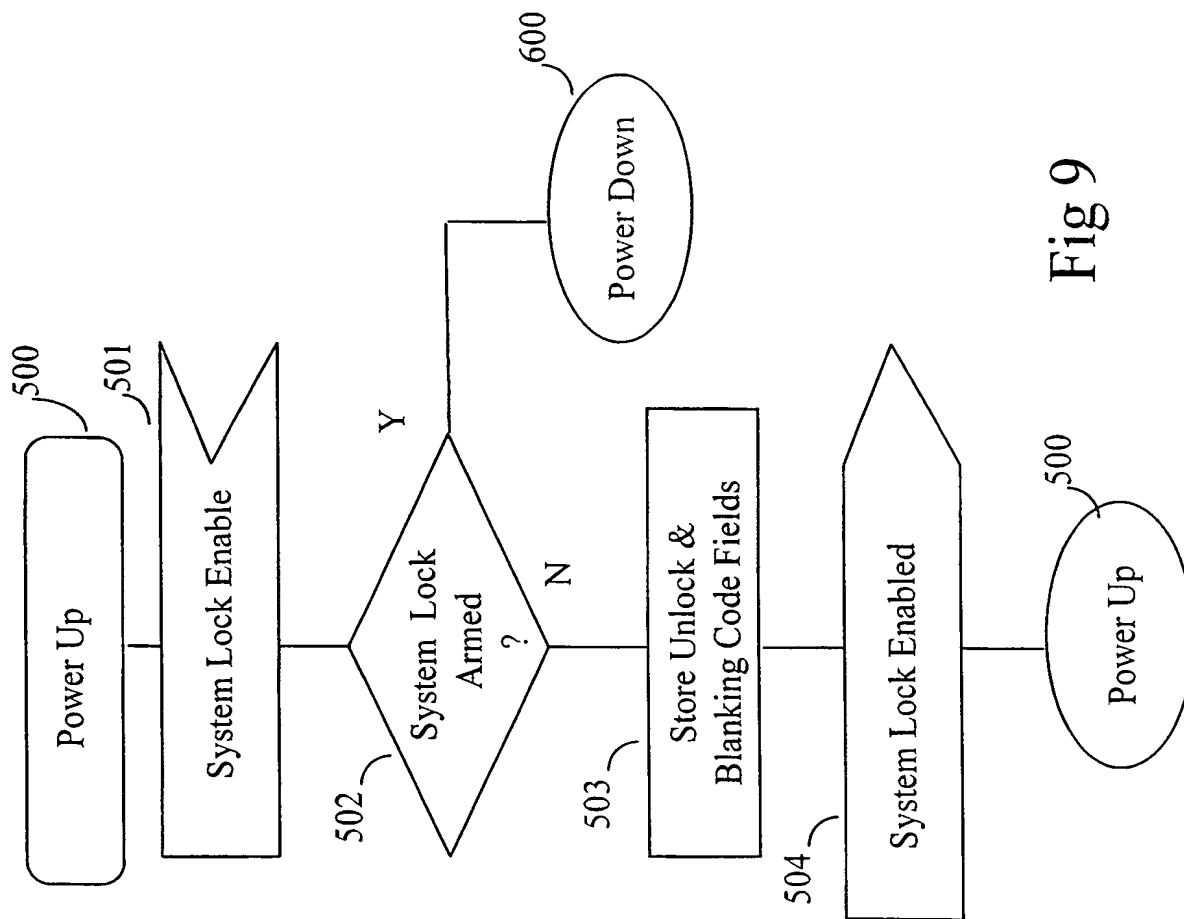


Fig 8A



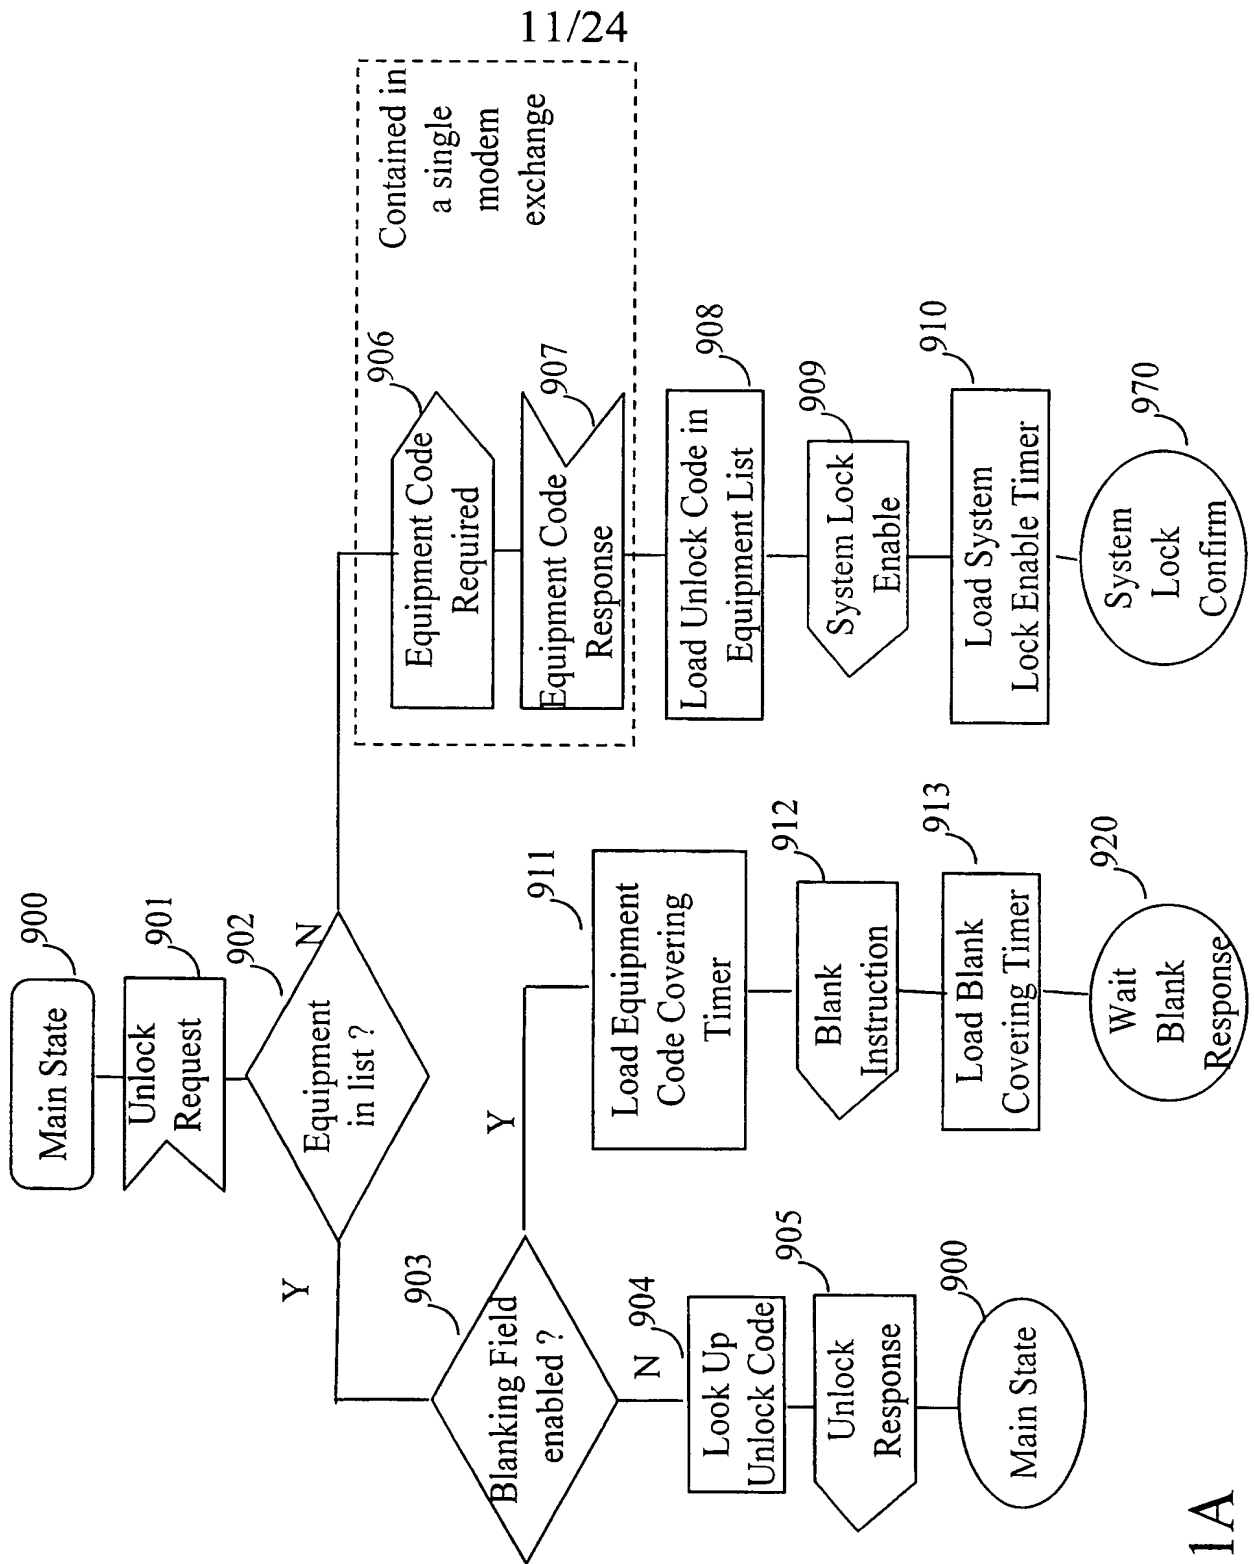
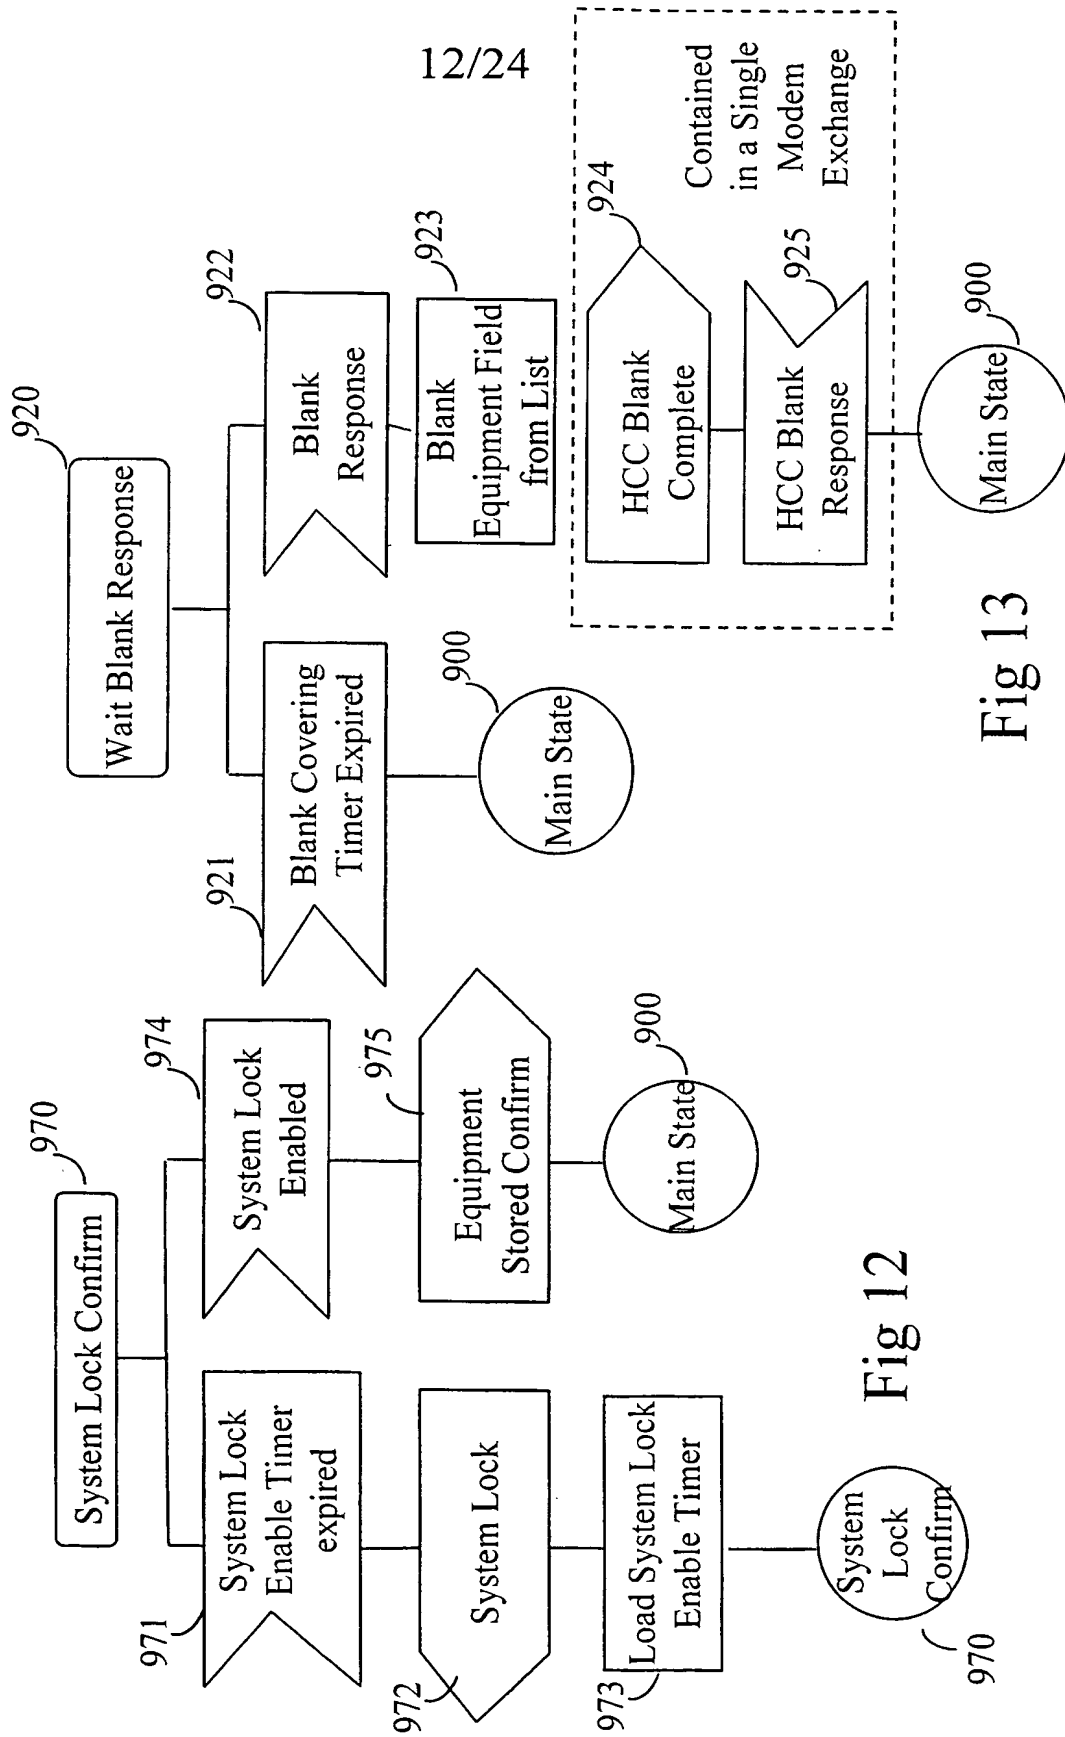


Fig 11A




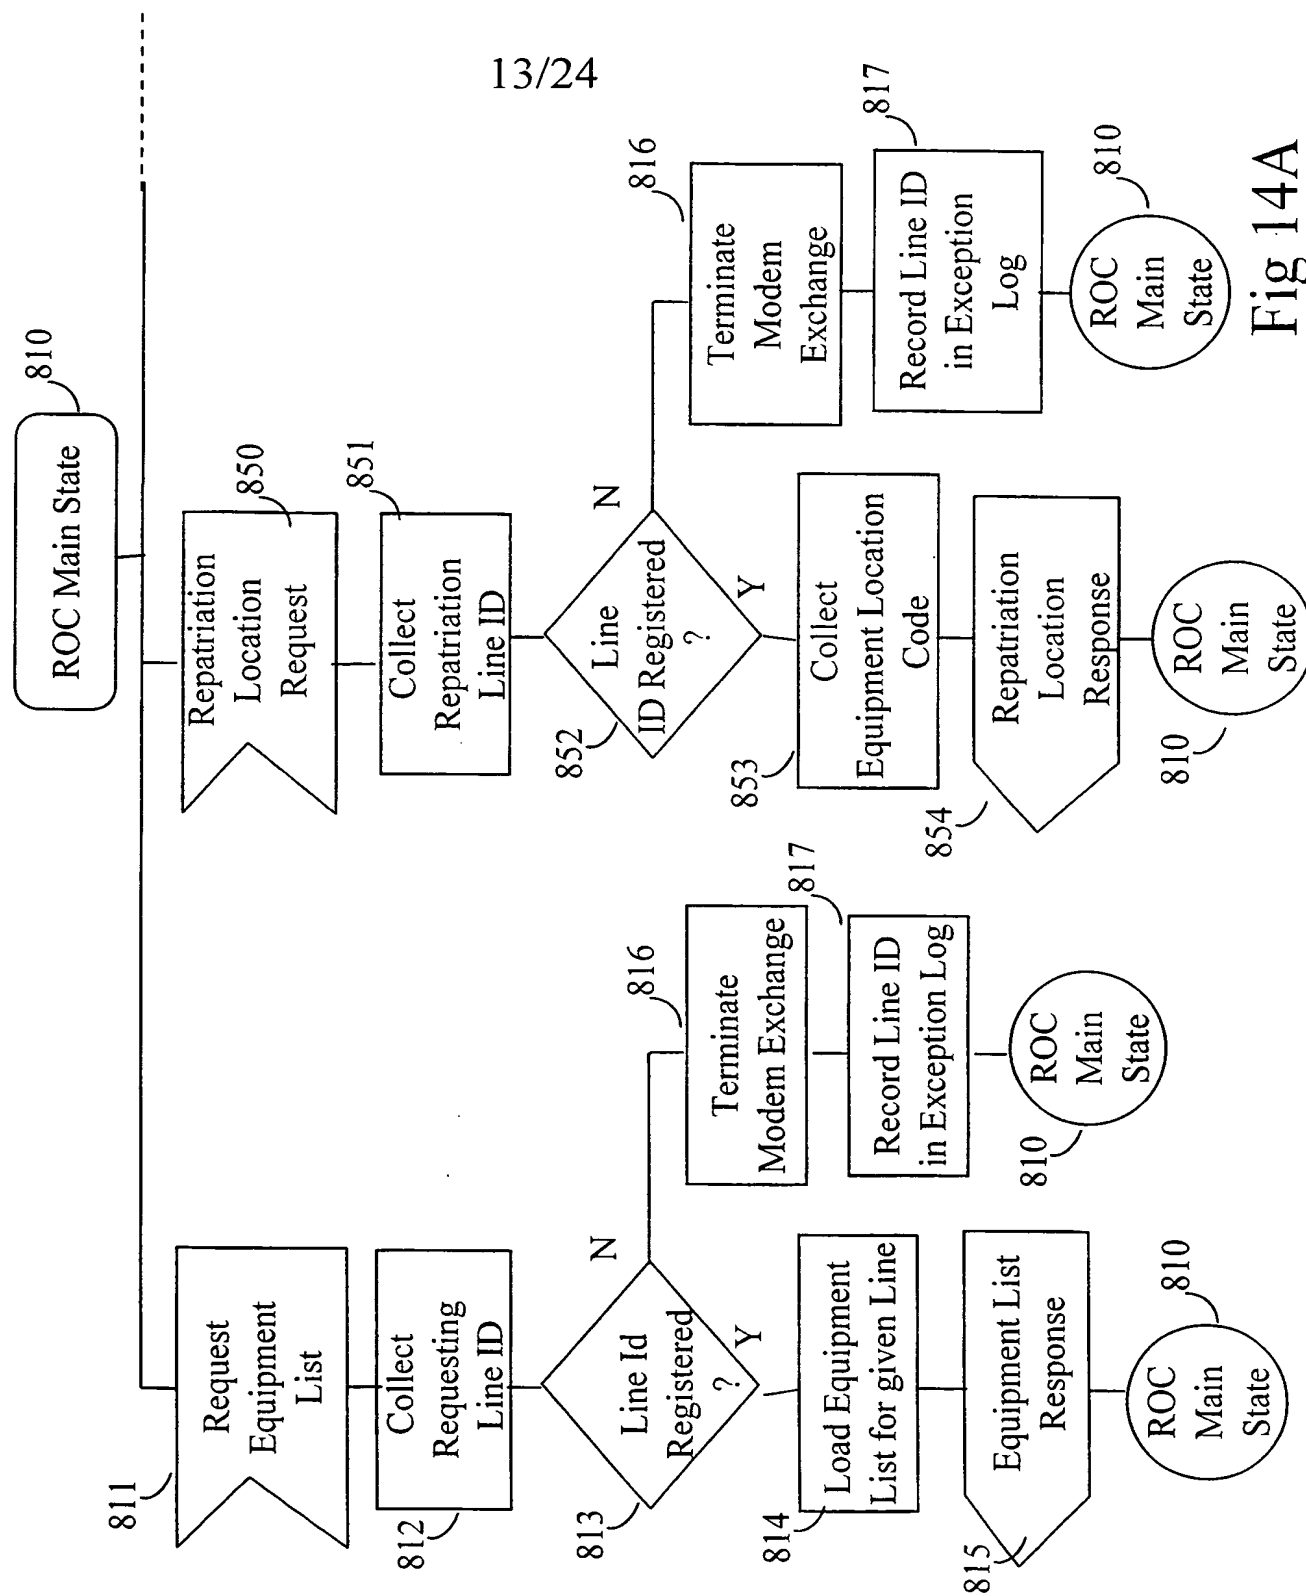


Fig 14A



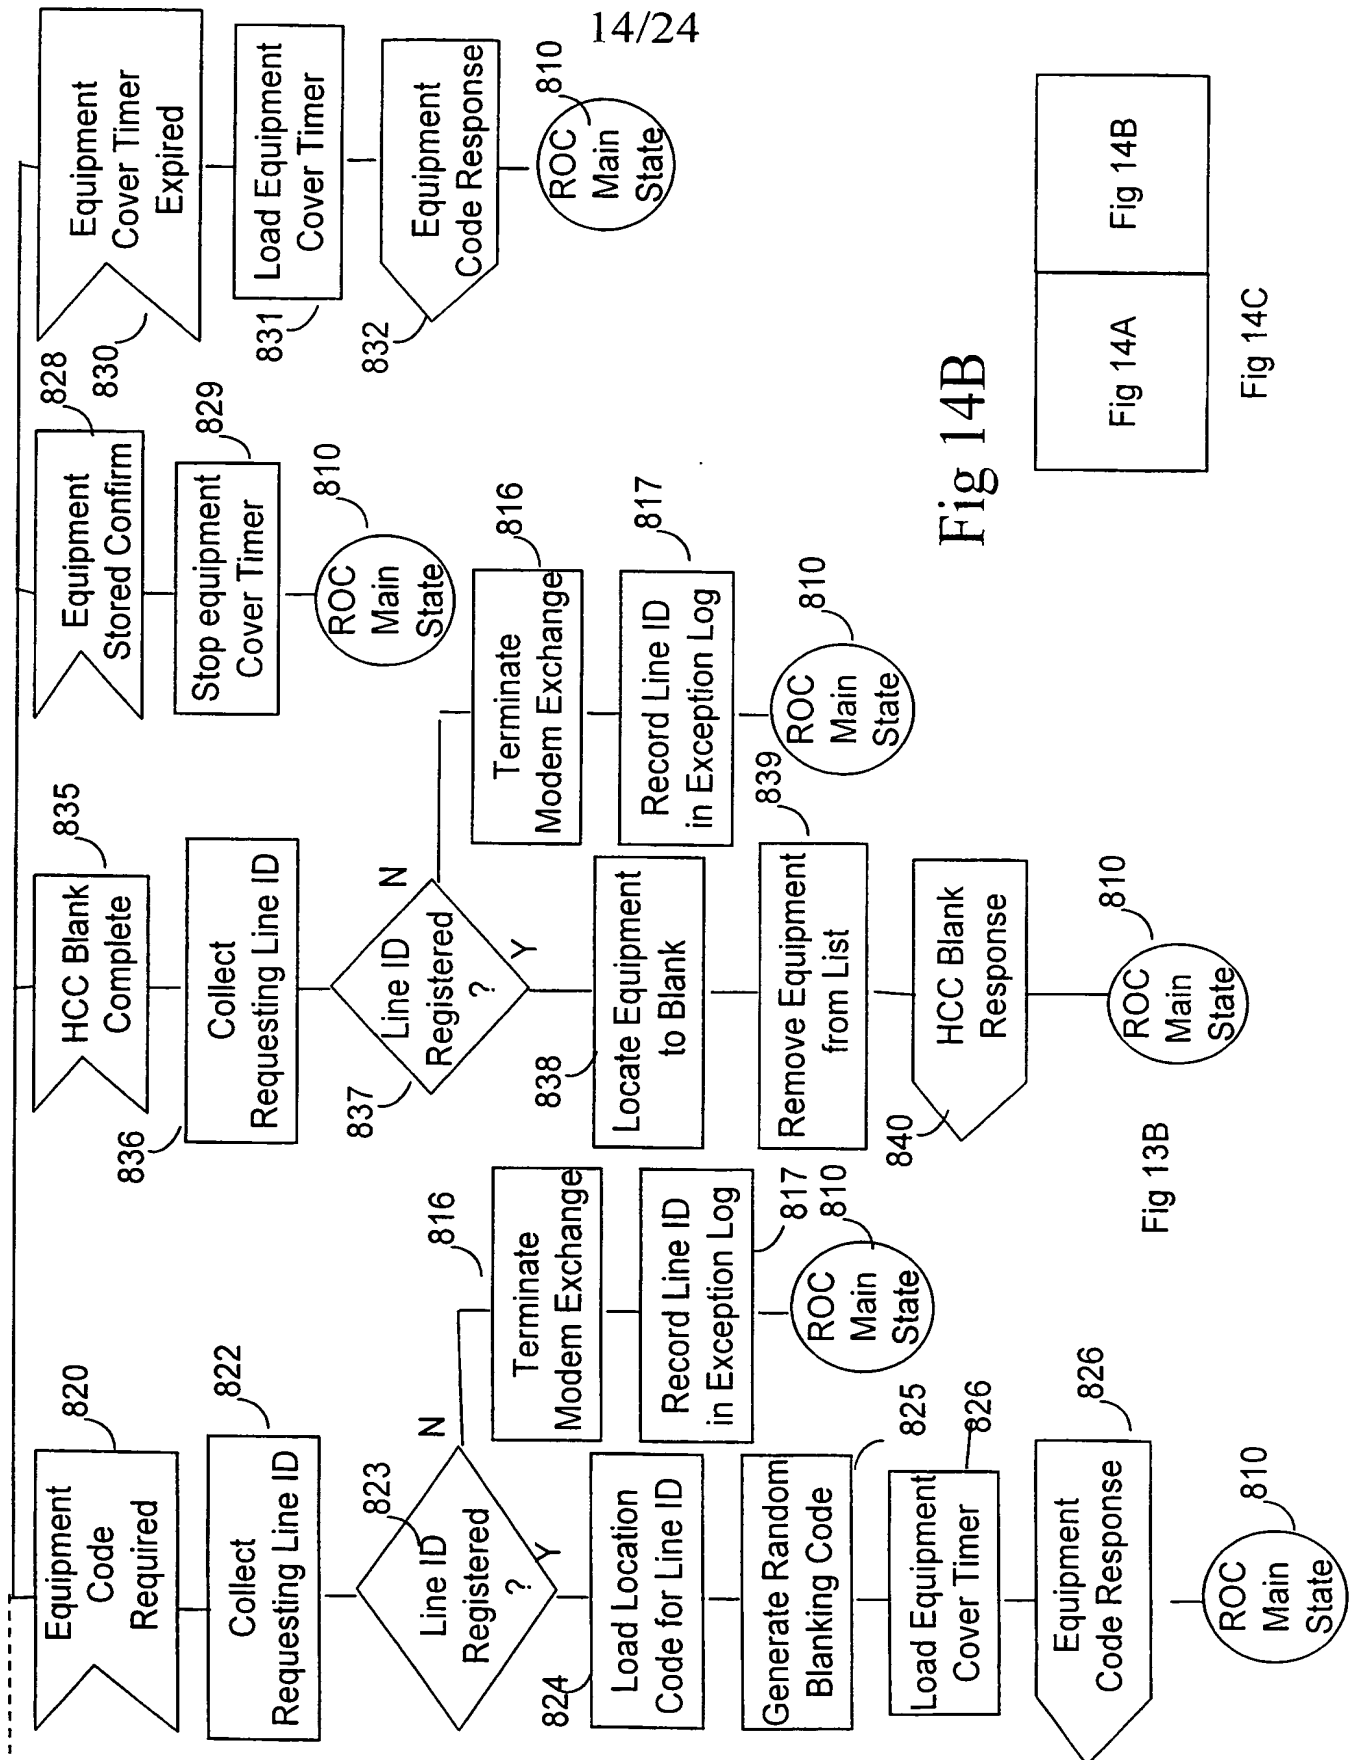

15/24

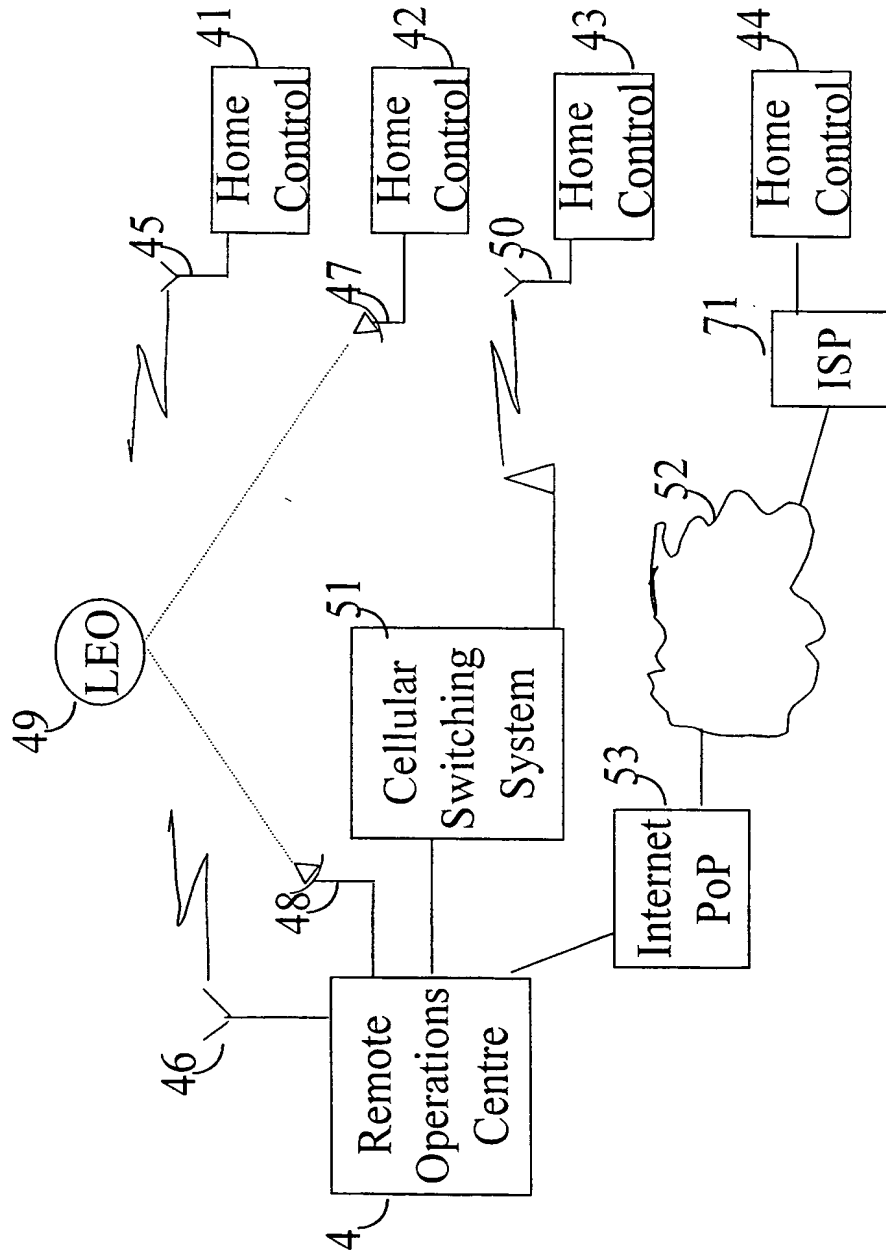


Fig 15

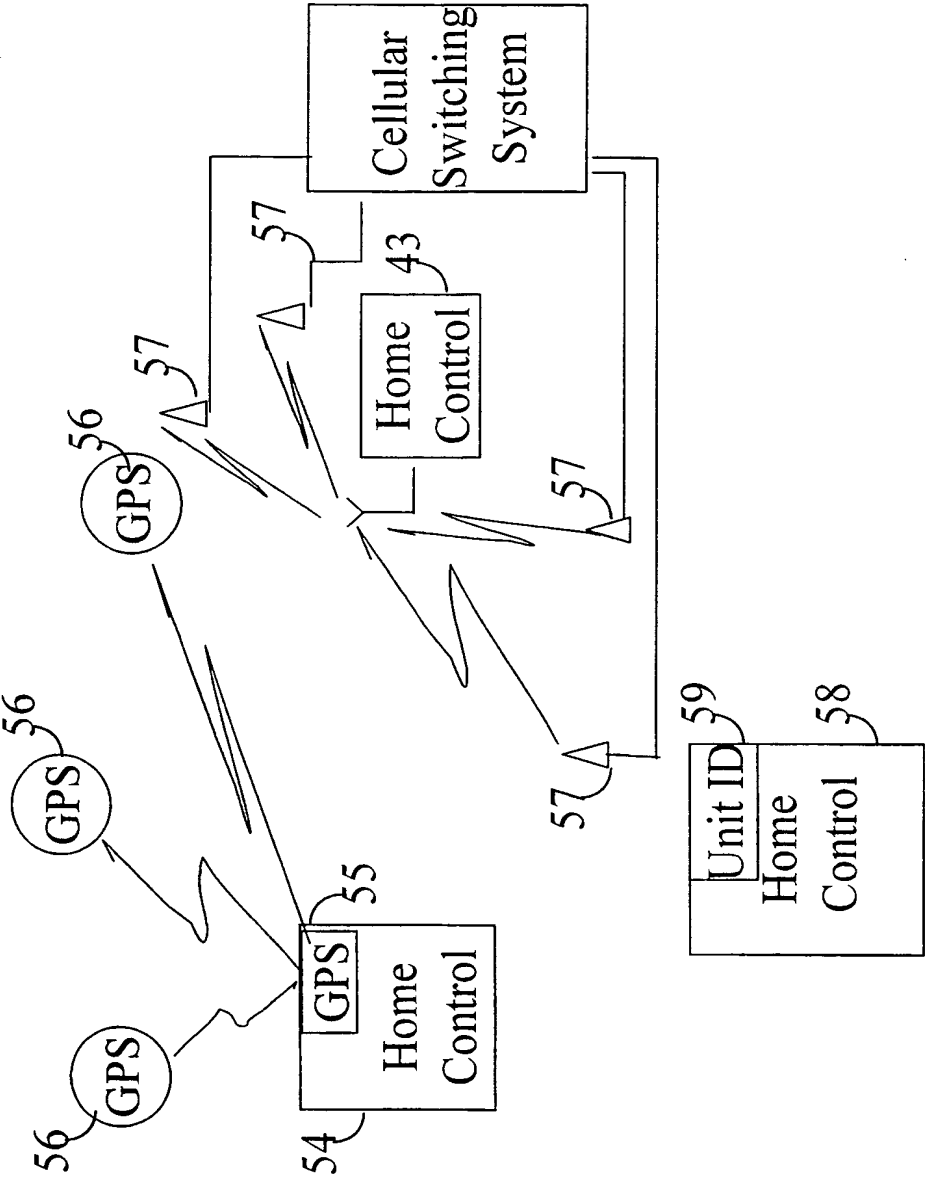


Fig 16

17/24

5

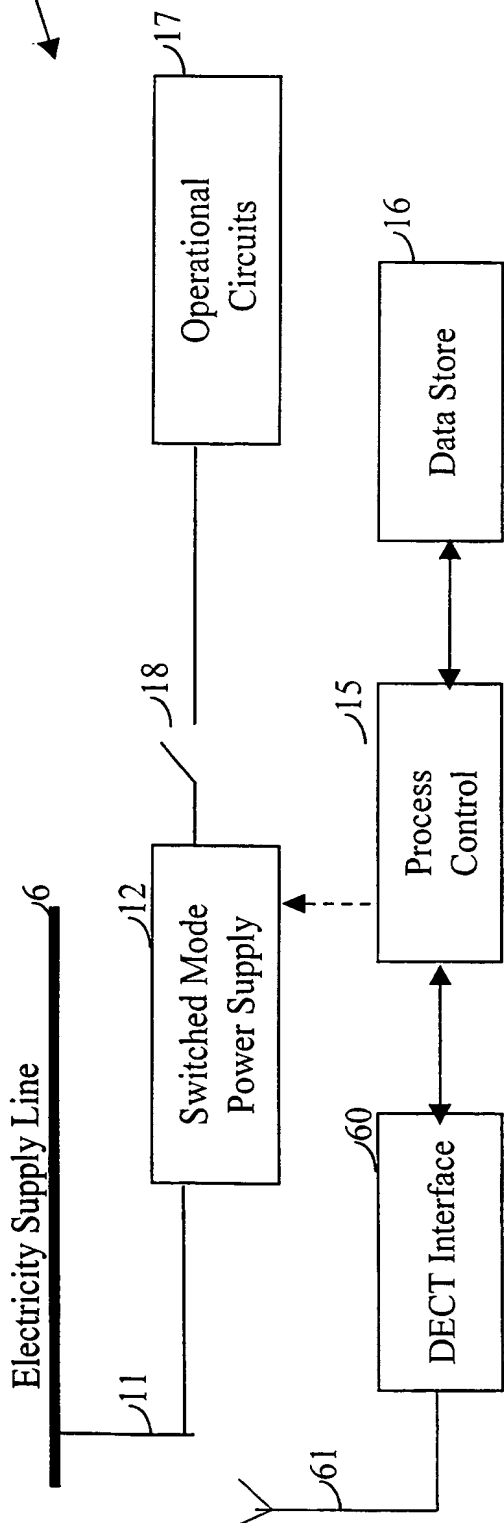


Fig 17

2

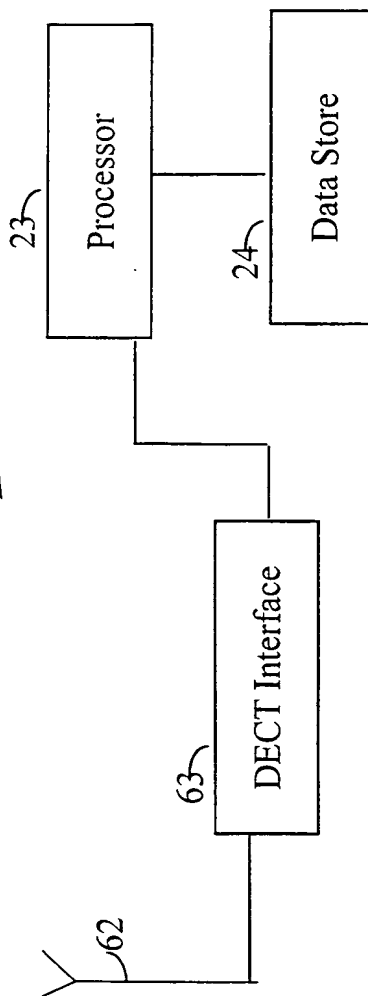


Fig 18

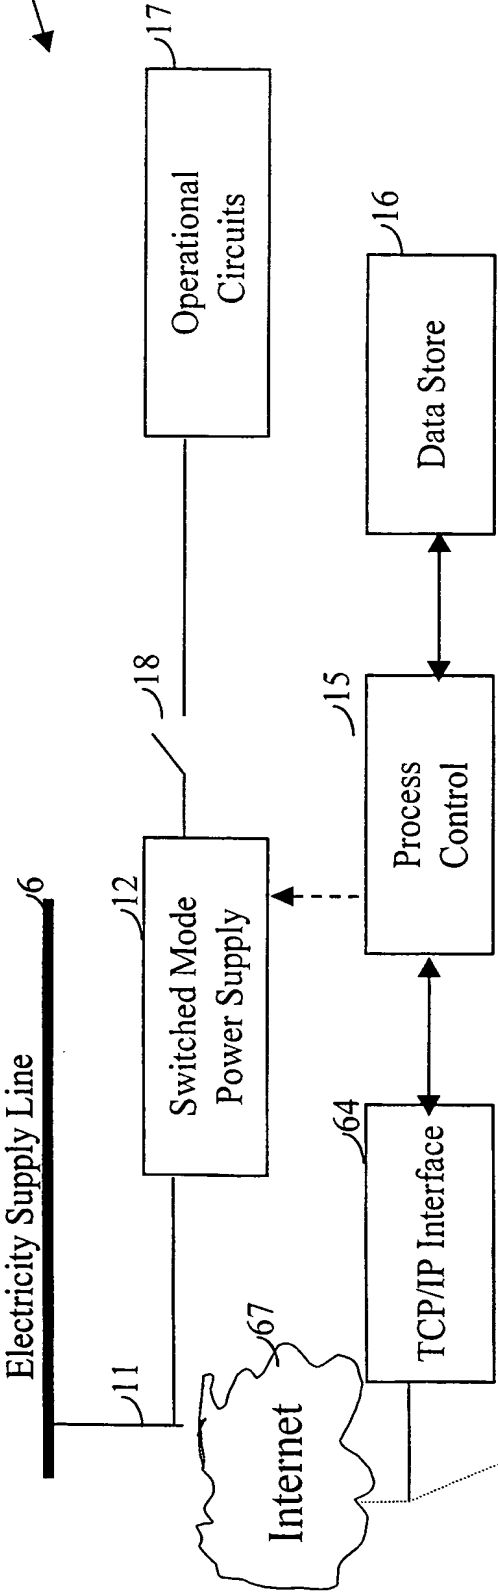


Fig 19

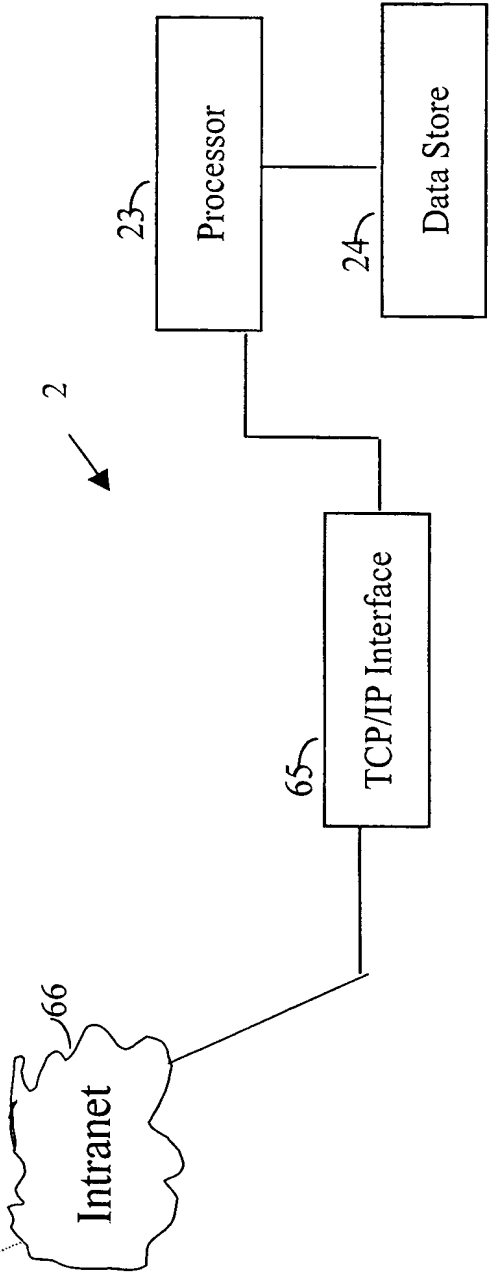


Fig 20

19/24

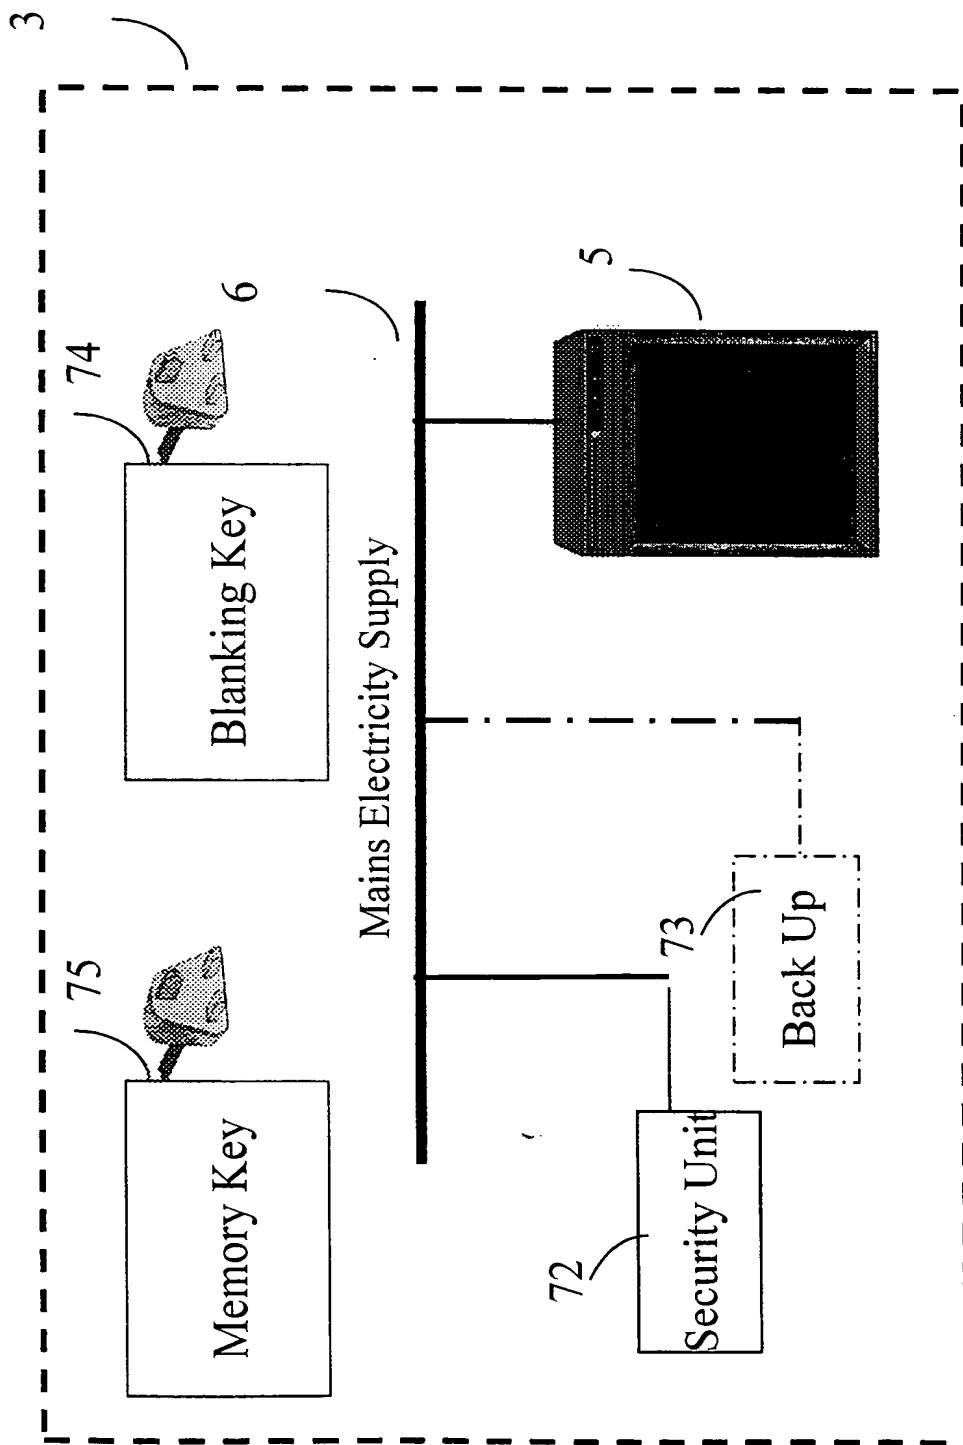


Fig 21

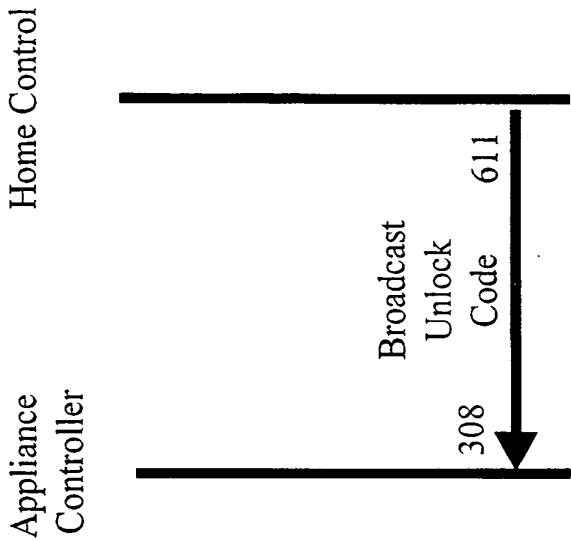


Fig 26A

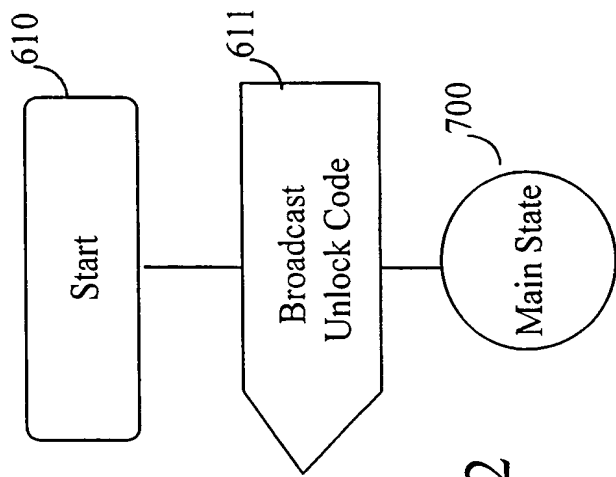


Fig 22

21/24

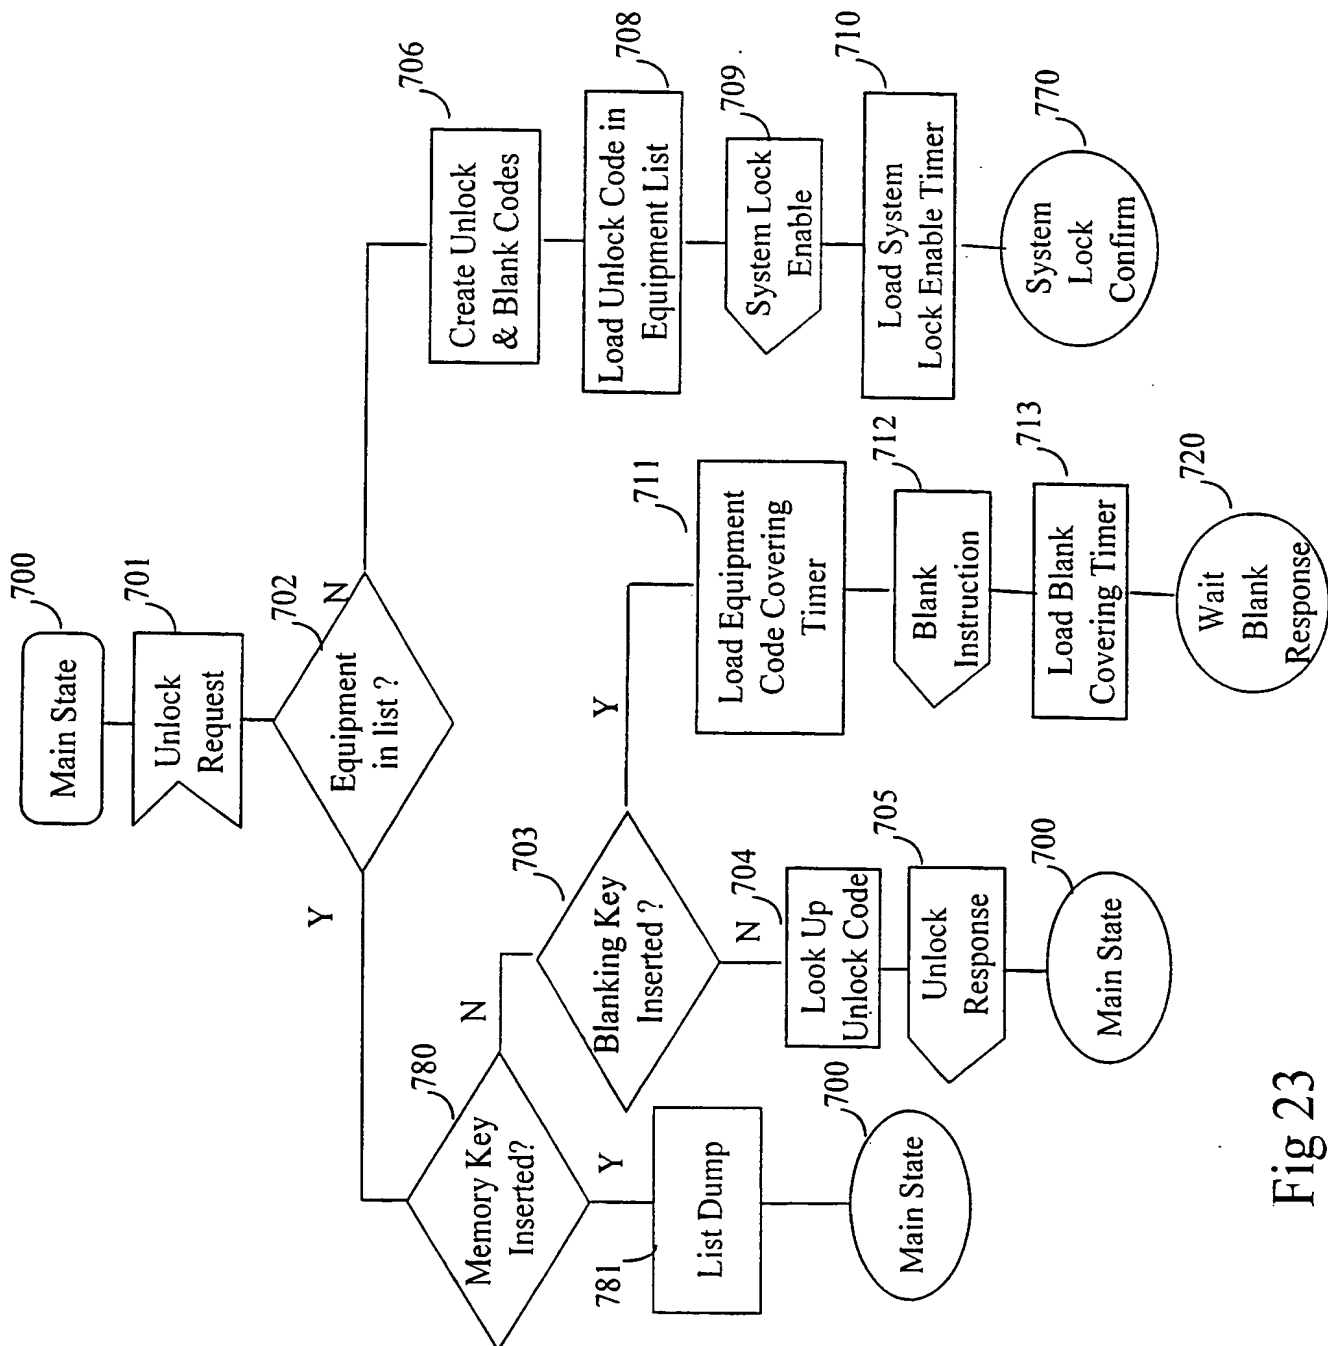


Fig 23



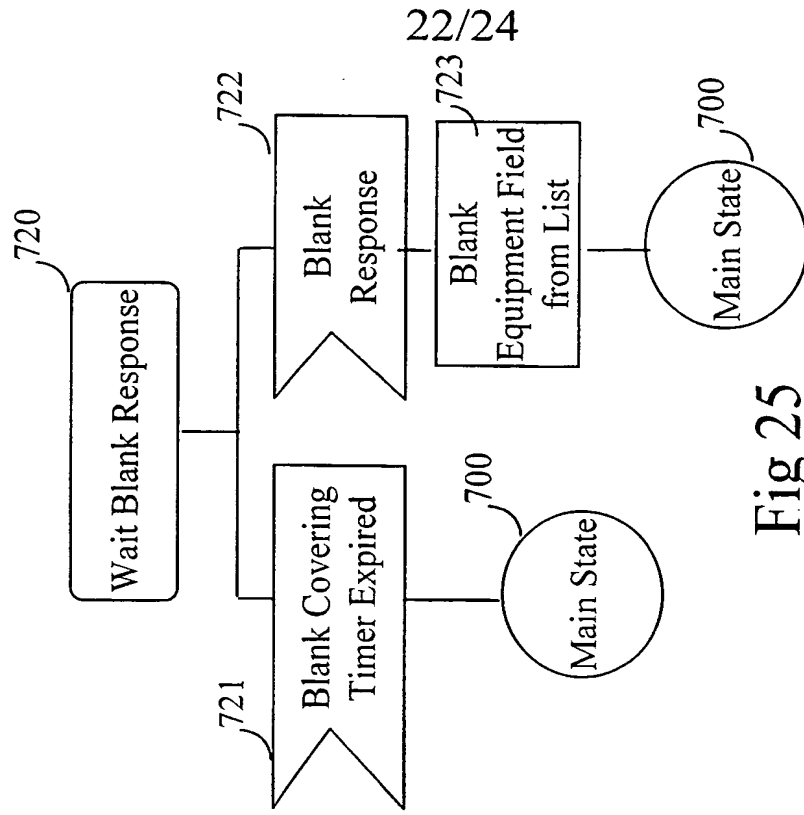


Fig 25




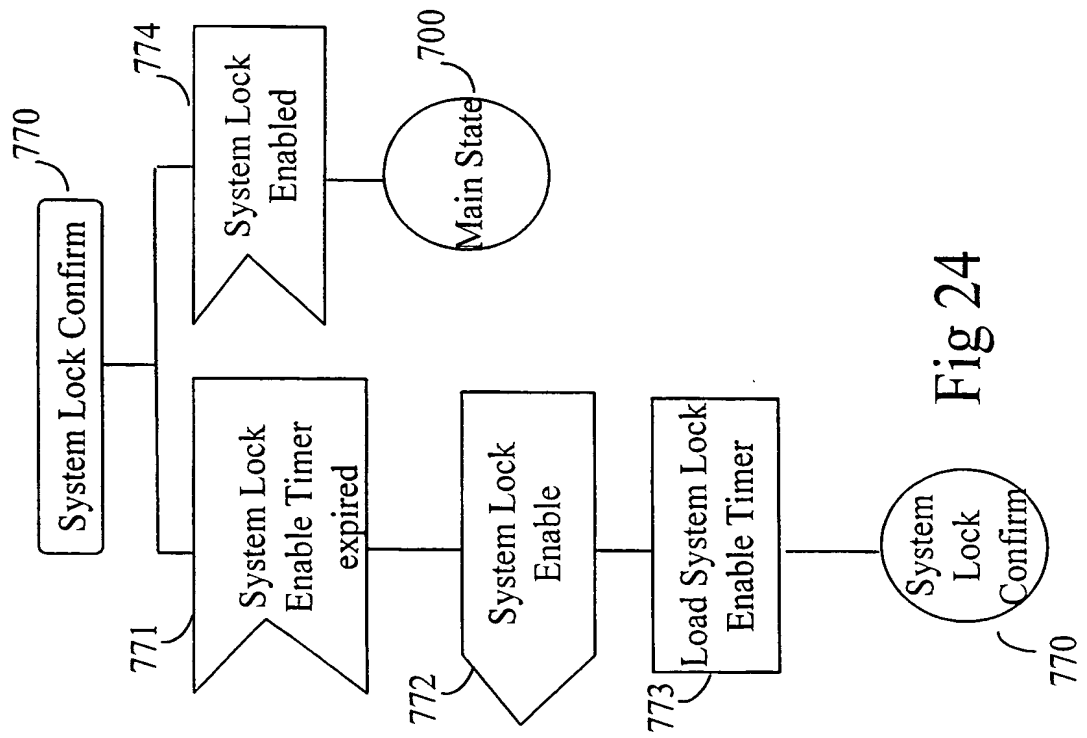


Fig 24

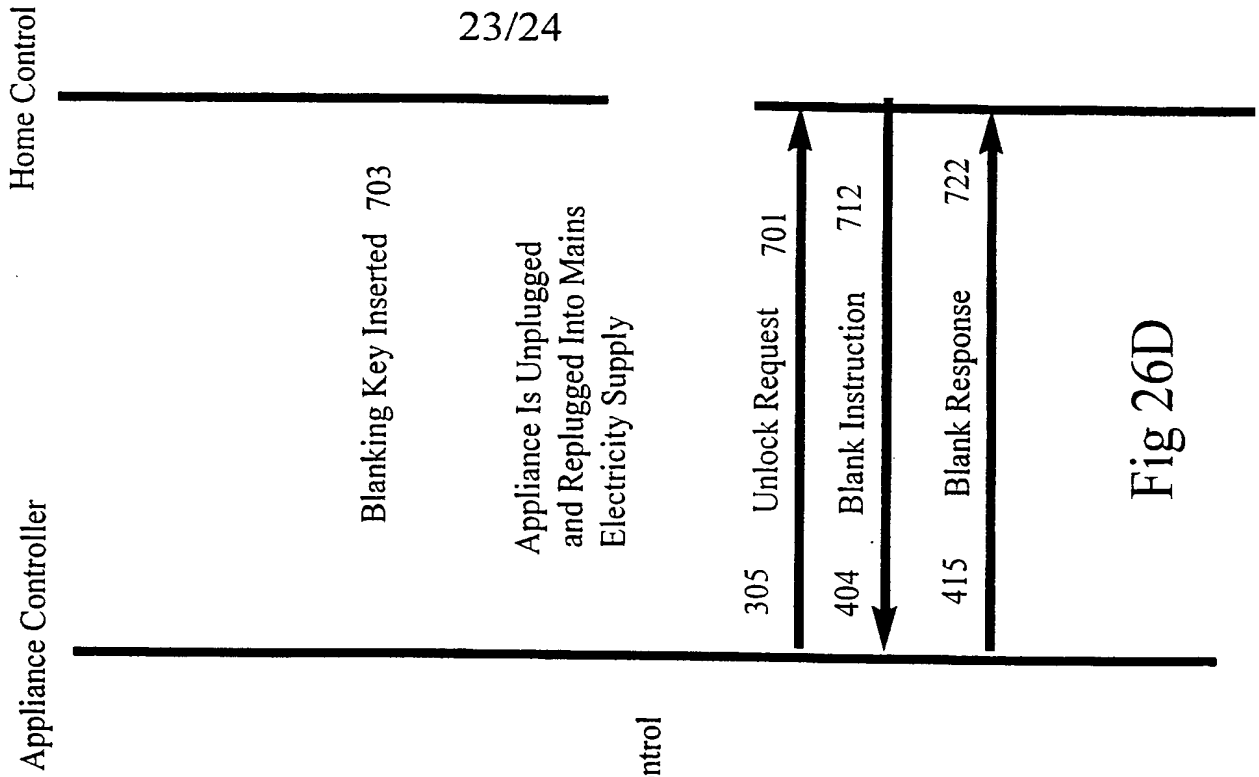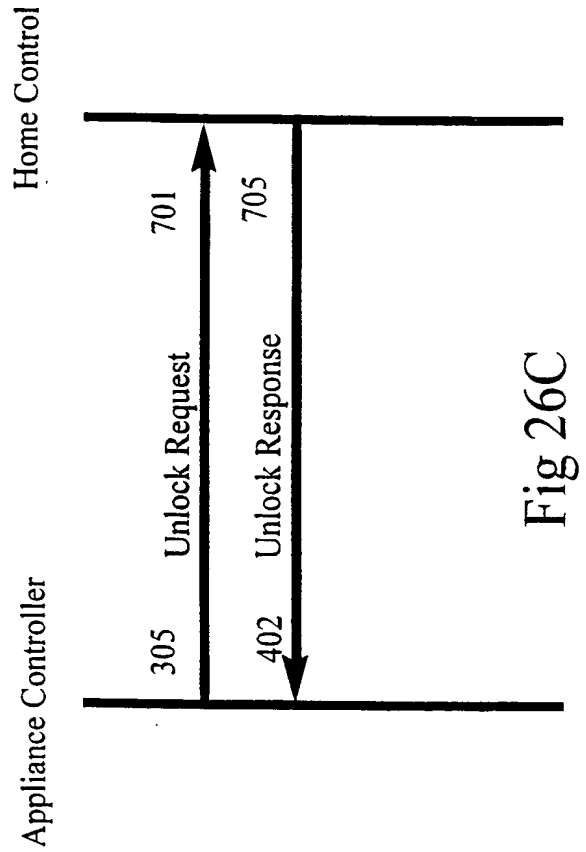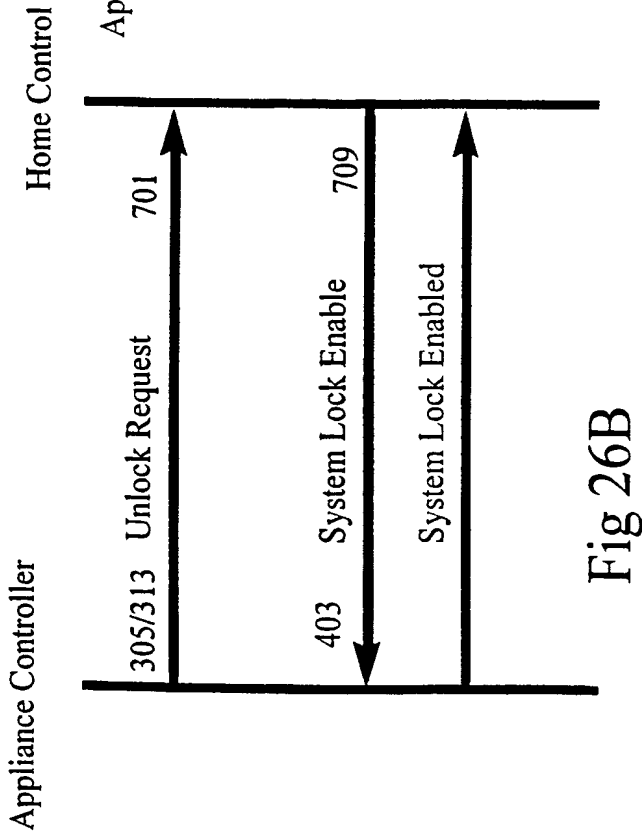

24/24

<b>Data Storage: Stand Alone Home control</b>
Number of Appliances in List (16 Bits)
House Unlock Code (24 Bits)
(Per Appliance): List No (16 Bits),
Appliance ID (128 Bits)
Appliance Unlock Code (24 Bits)
Blanking Code (24 Bits)
Flags: System Lock,

Fig 27

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00926

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G08B13/14 G06F1/00 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08B G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	WO 98 04967 A (BOWYER MARK DAVID JAMES ; COLLINS PETER DAVID (GB); ROYER KARL WILL) 5 February 1998 (1998-02-05)  page 3, line 6 -page 4, line 15 page 5, line 1 -page 6, line 15 page 9, line 18 -page 11, line 5 ---	1, 6, 12, 15, 16, 18, 20, 22 17, 21, 24
X A	US 5 684 951 A (GOLDMAN JONATHAN ET AL) 4 November 1997 (1997-11-04) abstract column 1, line 13 - line 57 column 2, line 7 - line 56 column 7, line 54 -column 9, line 60 --- -/--	1, 2, 4-7, 9-11 3, 8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

2 June 2000

Date of mailing of the international search report

09/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De la Cruz Valera, D

# INTERNATIONAL SEARCH REPORT

Int. .ional Application No

PCT/GB 00/00926

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 36391 A (BRITISH TELECOMM) 7 October 1998 (1998-10-07) cited in the application	1
A	page 4, line 28 -page 5, line 26 page 8, line 13 - line 18 page 1, line 26 -page 3, line 28 ----	2-24
X	WO 96 03728 A (KANG BALJIT SINGH) 8 February 1996 (1996-02-08) page 1, line 1 -page 4, line 7 page 5, line 24 -page 5, line 30 ----	1
Y	WO 96 12264 A (PHILIPS PATENTVERWALTUNG ;PHILIPS ELECTRONICS NV (NL); PHILIPS NOR) 25 April 1996 (1996-04-25) page 1, line 1 - line 10 page 3, line 21 - line 29 ----	17,21,24
A	MARGOLIN B: "SMARTER STUFF" BYTE, vol. 22, no. 6, 1 June 1997 (1997-06-01), page 85, 87, 89, 91/92 XP000691560 ISSN: 0360-5280 P.89 See frame "fun with internet appliances" ----	2-5
A	LAWTON G: "DAWN OF THE INTERNET APPLIANCE" COMPUTER, vol. 30, no. 10, 1 October 1997 (1997-10-01), page 16, 18 XP000738076 ISSN: 0018-9162 the whole document ----	2-18
A	ANONYMOUS: "Email Controlled Devices" RESEARCH DISCLOSURE, vol. 42, no. 417, XP002112875 Havant, UK, article No. 41796 the whole document -----	2-18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00926

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9804967	A	05-02-1998	AU	1551097 A	20-02-1998
			EP	0912919 A	06-05-1999
US 5684951	A	04-11-1997	NONE		
WO 9836391	A	20-08-1998	EP	0869462 A	07-10-1998
			AU	5995598 A	08-09-1998
			EP	0960407 A	01-12-1999
WO 9603728	A	08-02-1996	AU	2986495 A	22-02-1996
			GB	2304443 A, B	19-03-1997
WO 9612264	A	25-04-1996	EP	0734562 A	02-10-1996
			JP	9508226 T	19-08-1997